## **SIEMENS**

Data sheet 3RW5076-2TB04

SIRIUS



SIRIUS soft starter 200-480 V 470 A, 24 V AC/DC Spring-loaded terminals Thermistor input

Figure similar

product brand name

production and the control of the co	
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
<ul> <li>of standard HMI module usable</li> </ul>	<u>3RW5980-0HS01</u>
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1 436-2; Type of coordination 2, Iq = 65 kA
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE3 340-8; Type of coordination 2, Iq = 65 kA
<ul> <li>of line contactor usable up to 480 V</li> </ul>	<u>3RT1076</u>
<ul> <li>of line contactor usable up to 690 V</li> </ul>	<u>3RT1076</u>
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 50 %
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
accuracy class acc. to IEC 61557-12	5 %
certificate of suitability	
CE marking	Yes
<ul> <li>UL approval</li> </ul>	Yes
CSA approval	Yes
product component is supported	
HMI-Standard	Yes
HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2

trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>between main and auxiliary circuit</li> </ul>	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	23.09.2019 00:00:00
product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• Soft Torque	Yes
adjustable current limitation	Yes
pump ramp down	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic
• motor overload protection	motor overload protection)
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick
auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
communication function	Yes
operating measured value display	Yes; Only in conjunction with special accessories
error logbook	Yes; Only in conjunction with special accessories
via software parameterizable	No
via software parameterizatio      via software configurable	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard communication
• Fixor lenergy	module
voltage ramp	Yes
• torque control	No
analog output	No
Power Electronics	
operational current	
at 40 °C rated value	470 A
at 50 °C rated value	416 A
at 60 °C rated value	380 A
operating voltage	
• rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative negative tolerance of the operating voltage	10 %
operating power for 3-phase motors	10 /0
at 230 V at 40 °C rated value	132 kW
at 400 V at 40 °C rated value     at 400 V at 40 °C rated value	250 kW
	50 Hz
	JU IIZ
Operating frequency 1 rated value	60 Hz
Operating frequency 2 rated value	60 Hz
Operating frequency 2 rated value relative negative tolerance of the operating frequency	-10 %
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency	
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency adjustable motor current	-10 % 10 %
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency adjustable motor current  • at rotary coding switch on switch position 1	-10 % 10 % 200 A
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency adjustable motor current	-10 % 10 %

a to totary coding switch on switch position 5 at rotary coding switch on switch position 7 at rotary coding switch on switch position 9 at rotary coding switch on switch position 9 at rotary coding switch on switch position 10 at rotary coding switch on switch position 10 at rotary coding switch on switch position 11 at rotary coding switch on switch position 12 at rotary coding switch on switch position 12 at rotary coding switch on switch position 12 at rotary coding switch on switch position 13 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 14 at rotary coding switch positi		
e at rotary coding switch on switch position 6 at rotary coding switch on switch position 7 at rotary coding switch on switch position 8 at rotary coding switch on switch position 10 at rotary coding switch on switch position 10 at rotary coding switch on switch position 10 at rotary coding switch on switch position 11 at rotary coding switch on switch position 12 at rotary coding switch on switch position 12 at rotary coding switch on switch position 12 at rotary coding switch on switch position 14 at rotary coding switch on switch position 16 at rotary coding switch on switch position 14 at 80 °C during startup at 80 °C during startup at 80 °C during startup  at 80 °C during startup  at 80 °C during s	<ul> <li>at rotary coding switch on switch position 4</li> </ul>	254 A
at rotary coding switch on switch position 7 at rotary coding switch on switch position 8 at rotary coding switch on switch position 13 at rotary coding switch on switch position 14 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 at rotary code switch 18 at 80 T code switch 18 at 80 T code switch 1	<ul> <li>at rotary coding switch on switch position 5</li> </ul>	272 A
at rotary coding switch on switch position 9 at rotary coding switch on switch position 10 at rotary coding switch on switch position 11 at rotary coding switch on switch position 12 at rotary coding switch on switch position 12 at rotary coding switch on switch position 13 at rotary coding switch on switch position 14 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 at rotary coding switc	<ul> <li>at rotary coding switch on switch position 6</li> </ul>	290 A
at rotary coding switch on switch position 10 at rotary coding switch on switch position 11 at rotary coding switch on switch position 11 at rotary coding switch on switch position 13 at rotary coding switch on switch position 13 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 an aritimum  200 A  minimum toad [%]  power loss [W] for rated value of the current at AC  at 60 °C after startup 44 W 44 W 44 B	<ul> <li>at rotary coding switch on switch position 7</li> </ul>	308 A
at rotary coding switch on switch position 10 at rotary coding switch on switch position 12 at rotary coding switch on switch position 12 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 at rotary coding switch on switch position 15 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at 8 status 15 at rotary coding switch on switch position 15 at 8 status 15 at rotary coding switch on switch position 15 at 8 status 15 at rotary coding switch or switch switch 15 at 8 status 15 at rotary	<ul> <li>at rotary coding switch on switch position 8</li> </ul>	326 A
at rotary coding switch on switch position 11 at rotary coding switch on switch position 13 at rotary coding switch on switch position 13 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 at index position 16 at index position 16 at index position 16 at minimum load [16] power loss [W] for rated value of the current at AC at 40 °C after startup at 80 °C during startup at 80 °C	<ul> <li>at rotary coding switch on switch position 9</li> </ul>	344 A
at rotary coding switch on switch position 12 at rotary coding switch on switch position 13 at rotary coding switch on switch position 13 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 all rotary coding switch on switch position 15 at rotary coding switch on switch position 16 all rotary coding switch on switch position 15 all rotary coding switch on switc	<ul> <li>at rotary coding switch on switch position 10</li> </ul>	362 A
at rotary coding switch on switch position 12 at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 at rotary coding switch on switch position 16 minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 80 °C during startup a		380 A
a lat rotary coding switch on switch position 13 a lat rotary coding switch on switch position 15 at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 a minimum 200 A minimum load [%] power loss [W] for rated value of the current at AC at 50 °C after startup at 50 °C after startup at 50 °C after startup at 60 °C after startup b at 60 °C after startup b at 60 °C after startup at 60 °C after startup at 60 °C during startup b at 60 °C during startup  4 4 38 W 3 876 W  4 24 W 4 5 60 °C during startup  4 5 344 W 4 5 60 °C during startup 4 6 6 °C during startup 4 6 6 °C during startup 4 6 °C during startup 4 6 °C during startup 4 7 °C during startup 4 8 °C during startup 5 8 °C during start		398 A
at rotary coding switch on switch position 14 at rotary coding switch on switch position 15 at 70 A animum load [%]  power loss [W] for rated value of the current at AC at 40 °C after startup at 60 °C during startup bype of the motor protection  Electronic, tripping in the event of thermal overload of the motor control supply voltage of the control supply voltage at AC at 50 Hz rated value at 60 Hz ra		416 A
at rotary coding switch on switch position 15 at rotary coding switch on switch position 16 aminimum 200 A  minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup at 60		434 A
a trotary coding switch on switch position 16 minimum load [%] power loss [W] for rated value of the current at AC at 40 °C darter startup at 50 °C after startup at 60 °C after startup  at 60 °C after startup  at 60 °C during startup  bype of the motor protection  Control laught Control  Type of voltage of the control supply voltage  control supply voltage at AC  at 50 Hz rated value  at 60		452 A
minimum load [%] power loss [W] for rated value of the current at AC  • at 40 °C after startup • at 50 °C after startup • at 50 °C after startup • at 60 °C during startup • at 50 °C during startup • at 60 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup • a		
minimum load [%] power loss [W] for rated value of the current at AC		
power loss [W] for rated value of the current at AC		
at 40 °C after startup at 50 °C after startup 44 W 37 W  power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup 5 344 W at 50 °C during startup 4 438 W at 50 °C during startup 3 876 W  type of the motor protection  Control curciul Control  Type of with econtrol supply voltage of voltage of the control supply voltage at 60 °C during startup AC/DC  Control supply voltage at AC at 50 Hz rated value 4 4 0 °C during startup 4 438 W 4 438 W 4 438 W 4 458 W 4 40 Color of the motor of the motor of the motor of the mot		
at 60 °C after startup at 60 °C after startup 37 W  at 60 °C after startup 37 W  at 60 °C during startup 44 W  at 60 °C during startup 5 344 W  at 60 °C during startup 4 438 W  at 60 °C during startup 3 876 W  type of C during startup 5 367 W  type of the motor protection  Control circuit/ Control  Type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value 24 V  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 60 Hz  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at		56 W
• at 60 °C after startup     power loss [W] at AC at current limitation 350 %     • at 40 °C during startup     • at 50 °C during startup     • at 50 °C during startup     • at 50 °C during startup     • at 60 °C during startup     • at 50 °C during startup     • at 60 °C at 50 °C at 5		
power loss [W] at AC at current limitation 350 %  at 40 °C during startup  at 50 °C during startup  4 428 W  3 876 W  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage at AC  at 50 Hz rated value  24 V  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative negative tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  at DC rated value  24 V  24 V  20 %  voltage at DC  relative positive tolerance of the control supply voltage frequency  control supply voltage  at DC rated value  24 V  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC	•	
at 40 °C during startup at 50 °C during startup 4 438 W  3 876 W  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 Hz rated value at 60 Hz rated value at 60 Hz rated value at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative negative tolerance of the control supply voltage at DC control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value holding current in bypass operation rated value incoked-rotor current at close of bypass contact maximum innush current peak at application of control supply voltage design of the overvoltage protection  design of short-circuit protection for control circuit design of shor		
at 50 °C during startup at 60 °C during startup  bye of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage control supply voltage at AC at 60 Hz rated value at 60 Hz rated value bilder of the control supply voltage at AC control supply voltage at AC at 60 Hz rated value cat 60 Hz control supply voltage at AC at 50 Hz control supply voltage at AC at 50 Hz control supply voltage frequency control supply voltage frequency control supply voltage frequency control supply voltage frequency control supply voltage at AC at 60 Hz control supply voltage frequency control supply voltage at AC at 60 Hz control supply voltage frequency control supply voltage frequency control supply voltage at DC rated value control supply voltage at DC control supply control control control supply voltage at DC control supply control control control supply voltage at DC control supply control		5 344 W
• at 60 °C during startup  type of the motor protection  Electronic, tripping in the event of thermal overload of the motor  control circuit/ Control  type of voltage of the control supply voltage control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC  control supply voltage  • at DC rated value  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value holding current in bypass operation rated value inrush current peak at application of control supply voltage  duration of inrush current peak at application of control supply voltage  duration of inrush current peak at application of control supply voltage design of the overvoltage protection  design of short-circuit protection for control circuit design of short-circuit protection for control circuit design of short-circuit protection for control circuit circuit breaker (Icu= 800 A), IS and initiative circuit breaker (Icu= 300 A), IS and initiative circuit breaker (Icu= 800 A), IS and initiative circuit breaker (Icu= 300 A), IS and Icu at AC icu and in the control supply voltage in the event of the control supply voltage in the control supply voltage in the control circuit breaker (Icu= 800 A), IS and Icu at		
type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  Control supply voltage at AC  at 50 Hz rated value  at 60 Hz rated value  at 60 Hz rated value  crelative positive tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative negative tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  at DC rated value  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply voltage  at DC rated value  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply voltage  at DC rated value  10 %  10 %  10 %  10 %  10 %  10 %  10 %  10 %  11 %  12 I MS  13 A  14 Mg G fuse (lcu=1 kA), 6 A quick-acting fuse (lcu=1 kA), C1 miniature circuit breaker (lcu= 800 A), IS ericuit breaker (lcu= 800 A), IS ericu	3 1	
type of voltage of the control supply voltage control supply voltage at AC a at 50 Hz rated value b at 60 Hz rated value control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply voltage at DC relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum linush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection  design of short-circuit protection for control circuit design of short-circuit protection for control circuit breaker (Icu= 800 A), IS and initiative recircuit breaker (Icu= 800 A), IS and initiative relative rela		
type of voltage of the control supply voltage control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit design of short-circuit protection for control circuit circuit breaker ((cu= 600 A), C6 miniature circuit breaker ((cu= 300 A), IS		
control supply voltage at AC  at 50 Hz rated value  24 V  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance o		AC/DC
at 50 Hz rated value  at 60 Hz rated value  24 V  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage  at DC rated value  relative negative tolerance of the control supply voltage  at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply of 0 %  2		AOIDO
e at 60 Hz rated value  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  holding current in bypass operation rated value  holding current to be at application of control supply voltage maximum  inrush current peak at application of control supply voltage maximum  inrush current peak at application of control supply voltage duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  24 V  7.6 A  8.3 A  9.4 A g G fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is		24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit voltage at DC (cu = 1 kA), 6 A quick-acting fuse (Icu = 1 kA), C1 miniature circuit breaker (Icu = 300 A); Is		
relative positive tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  at DC rated value  24 V  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  at DC rated value  160 mA  160 mA  17.6 A  3.3 A  3.4 A  3.5 Gruiniature circuit protection for control circuit breaker (Icu= 1 kA), 6 A quick-acting fuse (Icu= 1 kA), C1 miniature circuit breaker (Icu= 500 A), C6 miniatur		
relative positive tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage at AC at 60 Hz  relative negative tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  holding current at close of bypass contact  maximum  inrush current peak at application of control supply voltage  maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  20 %  20 %  24 V  26 %  26 M  7.6 A  3.3 A  3.3 A  3.3 A  3.4 A  3.3 A  3.4 A  3.3 A  3.5 A  3.6 A  3.7 A  3.7 A  3.8 A  3.9 G fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 500 A), C6 miniature circuit breaker (Icu= 300 A); Is	voltage at AC at 50 Hz	-20 /0
relative negative tolerance of the control supply voltage at AC at 60 Hz  relative positive tolerance of the control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  design of short-circuit protection for control circuit breaker (Icu= 800 A), C6 miniature circuit breaker (Icu= 300 A); Is		20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz  control supply voltage frequency  relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  holding current in bypass operation rated value  locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is	relative negative tolerance of the control supply	-20 %
control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value  relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection  design of short-circuit protection for control circuit  50 60 Hz  -10 %  0 W  0 W  -20 %  0 W  160 mA  490 mA  7.6 A  3.3 A  12.1 ms  supply voltage  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is	relative positive tolerance of the control supply	20 %
relative negative tolerance of the control supply voltage frequency  relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is		50 60 Hz
voltage frequency  control supply voltage  • at DC rated value  24 V  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage design of the overvoltage protection  design of short-circuit protection for control circuit  design of short-circuit protection for control circuit breaker (Icu= 300 A); Is	relative negative tolerance of the control supply	
control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage design of the overvoltage protection  design of short-circuit protection for control circuit  design of short-circuit protection for control circuit breaker (Icu= 800 A), C6 miniature circuit breaker (Icu= 300 A); Is		10 %
relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is		
relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  voltage 20 %  160 mA  490 mA  7.6 A  12.1 ms  12.1 ms  Varistor  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 300 A); Is	at DC rated value	24 V
relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value locked-rotor current at close of bypass contact maximum inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is		-20 %
control supply current in standby mode rated value holding current in bypass operation rated value  locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is	relative positive tolerance of the control supply	20 %
holding current in bypass operation rated value  locked-rotor current at close of bypass contact maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  490 mA  7.6 A  3.3 A  12.1 ms  Varistor  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 300 A); Is		160 mA
Tooked-rotor current at close of bypass contact maximum   Tooked-rotor current at close of bypass contact maximum   Tooked-rotor current peak at application of control supply voltage maximum   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control supply voltage   Tooked-rotor current peak at application of control suppl	,	490 mA
inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is		7.6 A
maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 300 A), Is		
supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is	maximum	3.3 A
design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is	supply voltage	12.1 ms
circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is		
	design of short-circuit protection for control circuit	
	Inputs/ Outputs	

number of digital inputs	1
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick
number of digital outputs	3
<ul> <li>not parameterizable</li> </ul>	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	0
switching capacity current of the relay outputs	
<ul><li>at AC-15 at 250 V rated value</li></ul>	3 A
<ul> <li>at DC-13 at 24 V rated value</li> </ul>	1 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	230 mm
width	160 mm
depth	282 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
<ul><li>downwards</li></ul>	75 mm
at the side	5 mm
weight without packaging	7.3 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	spring-loaded terminals
width of connection bar maximum	45 mm
wire length for thermistor connection	
<ul> <li>with conductor cross-section = 0.5 mm² maximum</li> </ul>	50 m
<ul> <li>with conductor cross-section = 1.5 mm² maximum</li> </ul>	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
<ul> <li>for main contacts for box terminal using the front clamping point solid</li> </ul>	95 300 mm²
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded with core end processing</li> </ul>	70 240 mm²
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded without core end processing</li> </ul>	70 240 mm²
<ul> <li>for main contacts for box terminal using the front clamping point stranded</li> </ul>	95 300 mm²
<ul> <li>at AWG cables for main contacts for box terminal using the front clamping point</li> </ul>	3/0 600 kcmil
<ul> <li>for main contacts for box terminal using the back clamping point solid</li> </ul>	120 240 mm²
<ul> <li>at AWG cables for main contacts for box terminal using the back clamping point</li> </ul>	250 500 kcmil
<ul> <li>for main contacts for box terminal using both clamping points solid</li> </ul>	min. 2x 70 mm², max. 2x 240 mm²
<ul> <li>for main contacts for box terminal using both clamping points finely stranded with core end processing</li> </ul>	min. 2x 50 mm², max. 2x 185 mm²
<ul> <li>for main contacts for box terminal using both clamping points finely stranded without core end processing</li> </ul>	min. 2x 50 mm², max. 2x 185 mm²
<ul> <li>for main contacts for box terminal using both clamping points stranded</li> </ul>	min. 2x 70 mm², max. 2x 240 mm²
<ul> <li>for main contacts for box terminal using the back clamping point finely stranded with core end processing</li> </ul>	120 185 mm²

<ul> <li>for main contacts for box terminal using the back clamping point finely stranded without core end processing</li> </ul>	120 185 mm²
for main contacts for box terminal using the back clamping point stranded	120 240 mm²
type of connectable conductor cross-sections	
<ul> <li>at AWG cables for main current circuit solid</li> </ul>	2/0 500 kcmil
<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	50 240 mm²
for DIN cable lug for main contacts finely stranded	70 240 mm²
type of connectable conductor cross-sections	
for control circuit solid	2x (0.25 1.5 mm²)
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	2x (0.25 1.5 mm²)
<ul> <li>at AWG cables for control circuit solid</li> </ul>	2x (24 16)
<ul> <li>at AWG cables for control circuit finely stranded with core end processing</li> </ul>	2x (24 16)
wire length	
<ul> <li>between soft starter and motor maximum</li> </ul>	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	14 24 N·m
for auxiliary and control contacts with screw-type terminals	0.8 1.2 N·m
tightening torque [lbf·in]	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	124 210 lbf·in
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see manual
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
during operation acc. to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
during storage acc. to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
• during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
<ul> <li>PROFINET standard</li> </ul>	Yes
• EtherNet/IP	Yes
<ul> <li>Modbus RTU</li> </ul>	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
• of the fuse	
<ul> <li>— usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class L, max. 1600 A; lq = 30 kA
usable for High Faults up to 575/600 V     according to UL	Type: Class L, max. 1200 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
<ul> <li>at 200/208 V at 50 °C rated value</li> </ul>	150 hp
<ul> <li>at 220/230 V at 50 °C rated value</li> </ul>	150 hp
• at 460/480 V at 50 °C rated value	350 hp
Safety related data	
protection class IP on the front acc. to IEC 60529	IP00; IP20 with cover
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with cover

ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
hardware fault tolerance acc. to IEC 61508 relating to ATEX	0
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	0.09
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.000009 1/h
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y

## Certificates/ approvals

## **General Product Approval**

For use in hazardous locations













**Declaration of Conformity** 

**Test Certificates** 

other

**Miscellaneous** 



Type Test Certificates/Test Report

Confirmation

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5076-2TB04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5076-2TB04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5076-2TB04&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5076-2TB04/char


Characteristic: Installation altitude


 $\underline{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5076-2TB04\&objecttype=14\&gridview=view1}$ 

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917



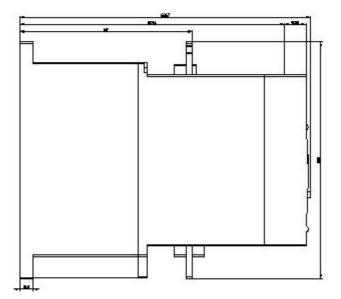

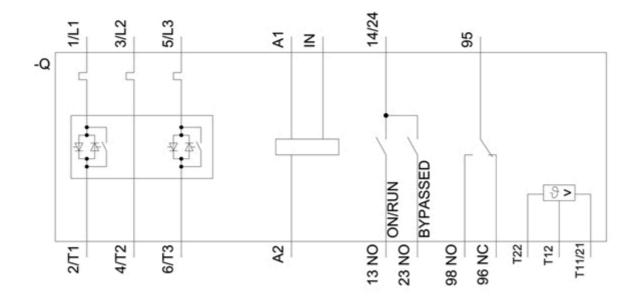

last modified: 6/24/2021 🖸