## **SIEMENS**

Data sheet 3RW4037-1TB05



SIRIUS soft starter S2 63 A, 37 kW/500 V, 40  $^{\circ}\text{C}$  400-600 V AC, 24 V AC/DC Screw terminals Thermistor motor protection

Figure similar

General technical data		
product brand name		SIRIUS
product feature		
<ul> <li>integrated bypass contact system</li> </ul>		Yes
• thyristors		Yes
product function		
<ul> <li>intrinsic device protection</li> </ul>		Yes
<ul> <li>motor overload protection</li> </ul>		Yes
<ul> <li>evaluation of thermistor motor protection</li> </ul>		Yes
external reset		Yes
adjustable current limitation		Yes
• inside-delta circuit		No
product component motor brake output		No
insulation voltage rated value	V	600
degree of pollution		3, acc. to IEC 60947-4-2
reference code acc. to DIN EN 61346-2		Q
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
<ul> <li>at 40 °C rated value</li> </ul>	Α	63
<ul> <li>at 50 °C rated value</li> </ul>	Α	58
at 60 °C rated value	А	53
yielded mechanical performance for 3-phase motors		
• at 400 V		
<ul> <li>at standard circuit at 40 °C rated value</li> </ul>	W	30 000
● at 500 V		
— at standard circuit at 40 °C rated value	W	37 000
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	400 600
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at standard circuit	%	10

	_	
minimum load [%]	%	20
adjustable motor current for motor overload protection minimum rated value	Α	26
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during	- V	12
operation typical		
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply voltage frequency	- %	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC	.,	
at 50 Hz rated value	V	24
at 60 Hz rated value	- V	24
relative negative tolerance of the control supply voltage at AC at 50 Hz	- %	-20
relative positive tolerance of the control supply voltage at AC at 50 Hz	-	20
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	20
control supply voltage 1 at DC rated value	V	24
relative negative tolerance of the control supply voltage at DC	%	-20
relative positive tolerance of the control supply voltage at DC	%	20
display version for fault signal		red
Mechanical data		
size of engine control device		S2
size of engine control device width	mm	55
size of engine control device width height	mm	55 160
size of engine control device width height depth	-	55 160 170
size of engine control device width height depth fastening method	mm	55 160 170 screw and snap-on mounting
size of engine control device width height depth	mm	55 160 170
size of engine control device width height depth fastening method	mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting  • upwards	mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting  • upwards • at the side	mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting  • upwards • at the side • downwards	mm mm mm mm	160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting  • upwards • at the side • downwards wire length maximum	mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting	mm mm mm mm	160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3 screw-type terminals
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3 screw-type terminals screw-type terminals
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit  Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3 screw-type terminals screw-type terminals
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum number of poles for main current circuit  Connections/ Terminals  type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3 screw-type terminals screw-type terminals
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3 screw-type terminals screw-type terminals 0 2
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting	mm mm mm mm	55 160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3 screw-type terminals screw-type terminals 0 2 1  2x (1.5 16 mm²) 0.75 25 mm²
size of engine control device width height depth fastening method mounting position  required spacing with side-by-side mounting	mm mm mm mm	160 170 screw and snap-on mounting With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t  60 30 40 300 3 screw-type terminals screw-type terminals 0 2 1

	-	
main contacts for box terminal using the back clamping point		
• solid		2x (1.5 16 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		1.5 25 mm²
• stranded		1.5 35 mm²
type of connectable conductor cross-sections for main contacts for box terminal using both clamping points		
• solid		2x (1.5 16 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		2x (1.5 16 mm²)
• stranded		2x (1.5 25 mm²)
type of connectable conductor cross-sections at AWG cables for main contacts for box terminal		
<ul> <li>using the back clamping point</li> </ul>		16 2
<ul> <li>using the front clamping point</li> </ul>		18 2
<ul> <li>using both clamping points</li> </ul>		2x (16 2)
type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		2x (0.5 1.5 mm²)
type of connectable conductor cross-sections at AWG cables		
<ul> <li>for auxiliary contacts</li> </ul>		2x (20 14)
<ul> <li>for auxiliary contacts finely stranded with core end processing</li> </ul>		2x (20 16)
Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category	•	
<ul> <li>during transport acc. to IEC 60721</li> </ul>		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
<ul> <li>during storage acc. to IEC 60721</li> </ul>		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul> <li>during operation acc. to IEC 60721</li> </ul>		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
<ul> <li>during operation</li> </ul>	°C	-25 +60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP on the front acc. to IEC 60529		IP20
touch protection on the front acc. to IEC 60529		finger-safe, for vertical contact from the front
Certificates/ approvals		

Certificates/ approvals

**General Product Approval** 

**EMC** 

For use in hazardous locations













**Test Certificates** 

Marine / Shipping

other

Special Test Certificate

Type Test Certificates/Test Report







Confirmation

Railway

Vibration and Shock Confirmation

UL/CSA ratings				
yielded mechanical performance [hp] for 3-phase AC motor				
• at 460/480 V				
<ul> <li>— at standard circuit at 50 °C rated value</li> </ul>	hp	40		
• at 575/600 V				
<ul> <li>at standard circuit at 50 °C rated value</li> </ul>	hp	50		
contact rating of auxiliary contacts according to UL		B300 / R300		
- 0 - 0				

## Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4037-1TB05

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4037-1TB05


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW4037-1TB05


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4037-1TB05&lang=en

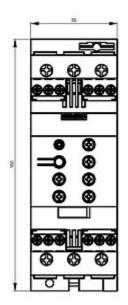

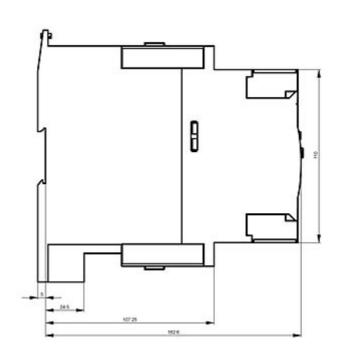

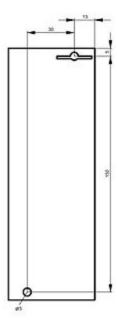

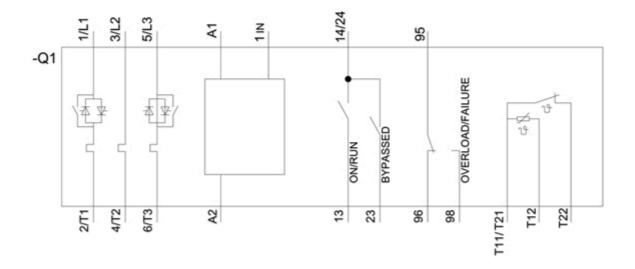

last modified: 12/15/2020 🖸