



SIRIUS soft starter 200-480 V 25 A, 24 V AC/DC spring-type terminals  
Analog output

|   |   |
|---|---|
| <b>product brand name</b>                               | SIRIUS  |
| <b>product category</b>                                 | Hybrid switching devices  |
| <b>product designation</b>                              | Soft starter  |
| <b>product type designation</b>                         | 3RW52   |
| <b>manufacturer's article number</b>                    | <ul style="list-style-type: none"> <li>• of standard HMI module usable <a href="#">3RW5980-0HS00</a></li> <li>• of high feature HMI module usable <a href="#">3RW5980-0HF00</a></li> <li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li> <li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li> <li>• of communication module Modbus TCP usable <a href="#">3RW5980-0CT00</a></li> <li>• of communication module Modbus RTU usable <a href="#">3RW5980-0CR00</a></li> <li>• of communication module Ethernet/IP <a href="#">3RW5980-0CE00</a></li> <li>• of circuit breaker usable at 400 V <a href="#">3RV2032-4EA10: Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V <a href="#">3RV2032-4EA10: Type of coordination 1, Iq = 15 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3RV2032-4VA10: Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V at inside-delta circuit <a href="#">3RV2032-4VA10: Type of coordination 1, Iq = 15 kA, CLASS 10</a></li> <li>• of the gG fuse usable up to 690 V <a href="#">3NA3822-6: Type of coordination 1, Iq = 65 kA</a></li> <li>• of the gG fuse usable at inside-delta circuit up to 500 V <a href="#">3NA3822-6: Type of coordination 1, Iq = 65 kA</a></li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE1817-0: Type of coordination 2, Iq = 65 kA</a></li> <li>• of back-up R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE8021-1: Type of coordination 2, Iq = 65 kA</a></li> </ul> |
| <b>General technical data</b>                           |   |
| <b>starting voltage [%]</b>                             | 30 ... 100 %  |
| <b>stopping voltage [%]</b>                             | 50 ... 50 %   |
| <b>start-up ramp time of soft starter</b>               | 0 ... 20 s  |
| <b>current limiting value [%] adjustable</b>            | 130 ... 700 %   |
| <b>certificate of suitability</b>                       | <ul style="list-style-type: none"> <li>• CE marking Yes</li> <li>• UL approval Yes</li> <li>• CSA approval Yes</li> </ul>   |
| <b>product component is supported</b>                   | <ul style="list-style-type: none"> <li>• HMI-Standard Yes</li> <li>• HMI-High Feature Yes</li> </ul>  |
| <b>product feature integrated bypass contact system</b> | Yes   |

|   |   |
|---|---|
| <b>number of controlled phases</b>  | 3   |
| <b>trip class</b>   | CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2                          |
| <b>buffering time in the event of power failure</b>                                 |   |
| • for main current circuit  | 100 ms  |
| • for control circuit   | 100 ms  |
| insulation voltage rated value  | 600 V   |
| <b>degree of pollution</b>  | 3, acc. to IEC 60947-4-2  |
| <b>impulse voltage rated value</b>  | 6 kV  |
| <b>blocking voltage of the thyristor maximum</b>                                    | 1 600 V   |
| <b>service factor</b>   | 1   |
| <b>surge voltage resistance rated value</b>   | 6 kV  |
| <b>maximum permissible voltage for safe isolation</b>                               |   |
| • between main and auxiliary circuit  | 600 V   |
| <b>shock resistance</b>   | 15 g / 11 ms, from 12 g / 11 ms with potential contact lifting                  |
| <b>vibration resistance</b>   | 15 mm to 6 Hz; 2g to 500 Hz   |
| utilization category acc. to IEC 60947-4-2  | AC 53a  |
| <b>reference code acc. to IEC 81346-2</b>   | Q   |
| <b>Substance Prohibitance (Date)</b>  | 15.02.2018 00:00:00   |
| <b>product function</b>   |   |
| • ramp-up (soft starting)   | Yes   |
| • ramp-down (soft stop)   | Yes   |
| • Soft Torque   | Yes   |
| • adjustable current limitation   | Yes   |
| • pump ramp down  | Yes   |
| • intrinsic device protection   | Yes   |
| • motor overload protection   | Yes; Electronic motor overload protection                                       |
| • evaluation of thermistor motor protection   | No  |
| • inside-delta circuit  | Yes   |
| • auto-RESET  | Yes   |
| • manual RESET  | Yes   |
| • remote reset  | Yes; By turning off the control supply voltage                                  |
| • communication function  | Yes   |
| • operating measured value display  | Yes; Only in conjunction with special accessories                               |
| • error logbook   | Yes; Only in conjunction with special accessories                               |
| • via software parameterizable  | No  |
| • via software configurable   | Yes   |
| • <b>PROFInergy</b>   | Yes; in connection with the PROFINET Standard communication module              |
| • <b>firmware update</b>  | Yes   |
| • <b>removable terminal for control circuit</b>                                     | Yes   |
| • torque control  | No  |
| • analog output   | Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI) |
| <b>Power Electronics</b>  |   |
| <b>operational current</b>  |   |
| • at 40 °C rated value  | 25 A  |
| • at 50 °C rated value  | 22 A  |
| • at 60 °C rated value  | 20 A  |
| <b>operational current at inside-delta circuit</b>                                  |   |
| • at 40 °C rated value  | 43.3 A  |
| • at 50 °C rated value  | 39 A  |
| • at 60 °C rated value  | 33.9 A  |
| <b>operating voltage</b>  |   |
| • rated value   | 200 ... 480 V   |
| • at inside-delta circuit rated value   | 200 ... 480 V   |
| <b>relative negative tolerance of the operating voltage</b>                         | -15 %   |
| <b>relative positive tolerance of the operating voltage</b>                         | 10 %  |
| <b>relative negative tolerance of the operating voltage at inside-delta circuit</b> | -15 %   |

|   |         |
|---|---------|
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b> | 10 %    |
| <b>operating power for 3-phase motors</b>   |         |
| • at 230 V at 40 °C rated value   | 5.5 kW  |
| • at 230 V at inside-delta circuit at 40 °C rated value                             | 11 kW   |
| • at 400 V at 40 °C rated value   | 11 kW   |
| • at 400 V at inside-delta circuit at 40 °C rated value                             | 18.5 kW |
| <b>Operating frequency 1 rated value</b>  | 50 Hz   |
| <b>Operating frequency 2 rated value</b>  | 60 Hz   |
| <b>relative negative tolerance of the operating frequency</b>                       | -10 %   |
| <b>relative positive tolerance of the operating frequency</b>                       | 10 %    |
| <b>adjustable motor current</b>   |         |
| • at rotary coding switch on switch position 1                                      | 11.5 A  |
| • at rotary coding switch on switch position 2                                      | 12.4 A  |
| • at rotary coding switch on switch position 3                                      | 13.3 A  |
| • at rotary coding switch on switch position 4                                      | 14.2 A  |
| • at rotary coding switch on switch position 5                                      | 15.1 A  |
| • at rotary coding switch on switch position 6                                      | 16 A    |
| • at rotary coding switch on switch position 7                                      | 16.9 A  |
| • at rotary coding switch on switch position 8                                      | 17.8 A  |
| • at rotary coding switch on switch position 9                                      | 18.7 A  |
| • at rotary coding switch on switch position 10                                     | 19.6 A  |
| • at rotary coding switch on switch position 11                                     | 20.5 A  |
| • at rotary coding switch on switch position 12                                     | 21.4 A  |
| • at rotary coding switch on switch position 13                                     | 22.3 A  |
| • at rotary coding switch on switch position 14                                     | 23.2 A  |
| • at rotary coding switch on switch position 15                                     | 24.1 A  |
| • at rotary coding switch on switch position 16                                     | 25 A    |
| • minimum   | 11.5 A  |
| <b>adjustable motor current</b>   |         |
| • for inside-delta circuit at rotary coding switch on switch position 1             | 19.9 A  |
| • for inside-delta circuit at rotary coding switch on switch position 2             | 21.5 A  |
| • for inside-delta circuit at rotary coding switch on switch position 3             | 23 A    |
| • for inside-delta circuit at rotary coding switch on switch position 4             | 24.6 A  |
| • for inside-delta circuit at rotary coding switch on switch position 5             | 26.2 A  |
| • for inside-delta circuit at rotary coding switch on switch position 6             | 27.7 A  |
| • for inside-delta circuit at rotary coding switch on switch position 7             | 29.3 A  |
| • for inside-delta circuit at rotary coding switch on switch position 8             | 30.8 A  |
| • for inside-delta circuit at rotary coding switch on switch position 9             | 32.4 A  |
| • for inside-delta circuit at rotary coding switch on switch position 10            | 33.9 A  |
| • for inside-delta circuit at rotary coding switch on switch position 11            | 35.5 A  |
| • for inside-delta circuit at rotary coding switch on switch position 12            | 37.1 A  |
| • for inside-delta circuit at rotary coding switch on switch position 13            | 38.6 A  |
| • for inside-delta circuit at rotary coding switch on switch position 14            | 40.2 A  |
| • for inside-delta circuit at rotary coding switch on switch position 15            | 41.7 A  |
| • for inside-delta circuit at rotary coding switch on switch position 16            | 43.3 A  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at inside-delta circuit minimum</li> </ul> | 19.9 A   |
| <b>minimum load [%]</b>   | 15 %; Relative to smallest settable I <sub>e</sub>   |
| <b>power loss [W] for rated value of the current at AC</b>                          |  |
| <ul style="list-style-type: none"> <li>• at 40 °C after startup</li> </ul>          | 20 W   |
| <ul style="list-style-type: none"> <li>• at 50 °C after startup</li> </ul>          | 19 W   |
| <ul style="list-style-type: none"> <li>• at 60 °C after startup</li> </ul>          | 18 W   |
| <b>power loss [W] at AC at current limitation 350 %</b>                             |  |
| <ul style="list-style-type: none"> <li>• at 40 °C during startup</li> </ul>         | 376 W  |
| <ul style="list-style-type: none"> <li>• at 50 °C during startup</li> </ul>         | 318 W  |
| <ul style="list-style-type: none"> <li>• at 60 °C during startup</li> </ul>         | 278 W  |
| <b>Control circuit/ Control</b>   |  |
| <b>type of voltage of the control supply voltage</b>                                | AC/DC  |
| <b>control supply voltage at AC</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>            | 24 V   |
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>            | 24 V   |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>     | -20 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>     | 20 %   |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>     | -20 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>     | 20 %   |
| <b>control supply voltage frequency</b>   | 50 ... 60 Hz   |
| <b>relative negative tolerance of the control supply voltage frequency</b>          | -10 %  |
| <b>relative positive tolerance of the control supply voltage frequency</b>          | 10 %   |
| <b>control supply voltage</b>   |  |
| <ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>               | 24 V   |
| <b>relative negative tolerance of the control supply voltage at DC</b>              | -20 %  |
| <b>relative positive tolerance of the control supply voltage at DC</b>              | 20 %   |
| <b>control supply current in standby mode rated value</b>                           | 160 mA   |
| <b>holding current in bypass operation rated value</b>                              | 360 mA   |
| <b>locked-rotor current at close of bypass contact maximum</b>                      | 0.75 A   |
| <b>inrush current peak at application of control supply voltage maximum</b>         | 3.3 A  |
| <b>duration of inrush current peak at application of control supply voltage</b>     | 12.1 ms  |
| <b>design of the overvoltage protection</b>   | Varistor   |
| <b>design of short-circuit protection for control circuit</b>                       | 4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply |
| <b>Inputs/ Outputs</b>  |  |
| <b>number of digital inputs</b>   | 1  |
| <b>number of inputs for thermistor connection</b>                                   | 0  |
| <b>number of digital outputs</b>  | 3  |
| <ul style="list-style-type: none"> <li>• not parameterizable</li> </ul>             | 2  |
| <b>digital output version</b>   | 2 normally-open contacts (NO) / 1 changeover contact (CO)  |
| <b>number of analog outputs</b>   | 1  |
| <b>switching capacity current of the relay outputs</b>                              |  |
| <ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> </ul>   | 3 A  |
| <ul style="list-style-type: none"> <li>• at DC-13 at 24 V rated value</li> </ul>    | 1 A  |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | +/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface   |
| <b>fastening method</b>   | screw fixing   |
| <b>height</b>   | 275 mm   |

|  |   |
|--|---|
| <b>width</b>   | 170 mm  |
| <b>depth</b>   | 152 mm  |
| required spacing with side-by-side mounting  |   |
| <ul style="list-style-type: none"> <li>• forwards</li> <li>• backwards</li> <li>• upwards</li> <li>• downwards</li> <li>• at the side</li> </ul>   | 10 mm<br>0 mm<br>100 mm<br>75 mm<br>5 mm  |
| <b>weight without packaging</b>  | 2.1 kg  |
| <b>Connections/ Terminals</b>  |   |
| <b>type of electrical connection</b>   |   |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for control circuit</li> </ul>  | screw-type terminals<br>spring-loaded terminals   |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main current circuit solid</li> </ul>   | 2x (1.0 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1.0 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6.0 mm <sup>2</sup> )<br>2x (16 ... 12), 2x (14 ... 8)  |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>• for control circuit solid</li> <li>• for control circuit finely stranded with core end processing</li> <li>• at AWG cables for control circuit solid</li> <li>• at AWG cables for control circuit finely stranded with core end processing</li> </ul> | 2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (24 ... 16)<br>2x (24 ... 16)  |
| <b>wire length</b>   |   |
| <ul style="list-style-type: none"> <li>• between soft starter and motor maximum</li> <li>• at the digital inputs at AC maximum</li> <li>• at the digital inputs at DC maximum</li> </ul>   | 800 m<br>100 m<br>1 000 m   |
| <b>tightening torque</b>   |   |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>  | 2 ... 2.5 N·m<br>0.8 ... 1.2 N·m  |
| <b>tightening torque [lbf·in]</b>  |   |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>  | 18 ... 22 lbf·in<br>7 ... 10.3 lbf·in   |
| <b>Ambient conditions</b>  |   |
| installation altitude at height above sea level maximum  | 5 000 m; Derating as of 1000 m, see catalog   |
| <b>ambient temperature</b>   |   |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage and transport</li> </ul>   | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above<br>-40 ... +80 °C   |
| <b>environmental category</b>  |   |
| <ul style="list-style-type: none"> <li>• during operation acc. to IEC 60721</li> <li>• during storage acc. to IEC 60721</li> <li>• during transport acc. to IEC 60721</li> </ul>   | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6<br>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4<br>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) |
| <b>EMC emitted interference</b>  | acc. to IEC 60947-4-2: Class A  |
| <b>Communication/ Protocol</b>   |   |
| <b>communication module is supported</b>   |   |
| <ul style="list-style-type: none"> <li>• PROFINET standard</li> <li>• EtherNet/IP</li> <li>• Modbus RTU</li> <li>• Modbus TCP</li> <li>• PROFIBUS</li> </ul>   | Yes<br>Yes<br>Yes<br>Yes<br>Yes   |
| <b>UL/CSA ratings</b>  |   |
| <b>manufacturer's article number</b>   |   |

● of circuit breaker

- usable for Standard Faults at 460/480 V according to UL
- usable for High Faults at 460/480 V according to UL
- usable for Standard Faults at 460/480 V at inside-delta circuit according to UL
- usable for High Faults at 460/480 V at inside-delta circuit according to UL
- usable for Standard Faults at 575/600 V according to UL
- usable for Standard Faults at 575/600 V at inside-delta circuit according to UL

● of the fuse

- usable for Standard Faults up to 575/600 V according to UL
- usable for High Faults up to 575/600 V according to UL
- usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL
- usable for High Faults at inside-delta circuit up to 575/600 V according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA

Siemens type: 3RV2742, max.40 A or 3VA51, max. 60 A; Iq max = 65 kA

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA

Siemens type: 3VA51, max. 60 A; Iq max = 65 kA

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 80 A; Iq = 5 kA

Type: Class RK5 / K5, max. 100 A; Iq = 5 kA

Type: Class J / L, max. 100 A; Iq = 100 kA

Type: Class RK5 / K5, max. 100 A; Iq = 5 kA

Type: Class J / L, max. 100 A; Iq = 100 kA

**operating power [hp] for 3-phase motors**

- at 200/208 V at 50 °C rated value
- at 220/230 V at 50 °C rated value
- at 460/480 V at 50 °C rated value
- at 200/208 V at inside-delta circuit at 50 °C rated value
- at 220/230 V at inside-delta circuit at 50 °C rated value
- at 460/480 V at inside-delta circuit at 50 °C rated value

5 hp  
7.5 hp  
15 hp  
10 hp  
10 hp  
25 hp

**contact rating of auxiliary contacts according to UL**

R300-B300

**Safety related data**

**protection class IP on the front acc. to IEC 60529**

IP20

**touch protection on the front acc. to IEC 60529**

finger-safe, for vertical contact from the front

**electromagnetic compatibility**

in accordance with IEC 60947-4-2

**Certificates/ approvals**

General Product Approval

EMC

Declaration of Conformity



**Test Certificates**

**Marine / Shipping**

[Type Test Certificates/Test Report](#)



**other**

[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5215-3AC04>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5215-3AC04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5215-3AC04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5215-3AC04&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5215-3AC04&lang=en)

Characteristic: Tripping characteristics, I<sup>t</sup>, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5215-3AC04/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5215-3AC04&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

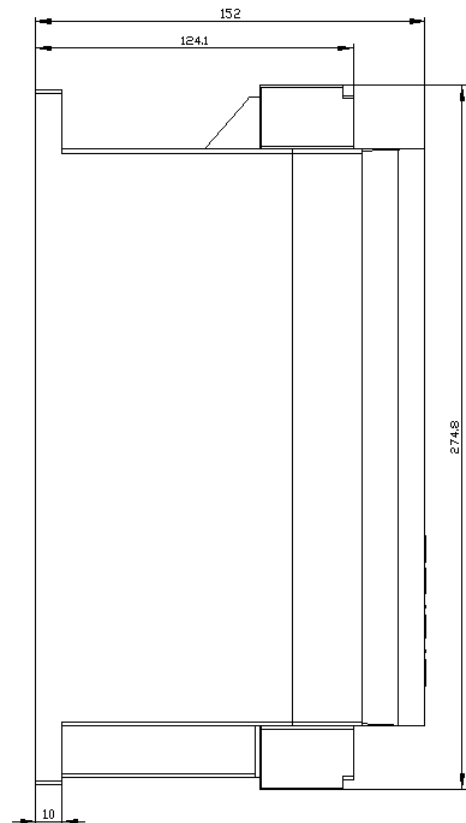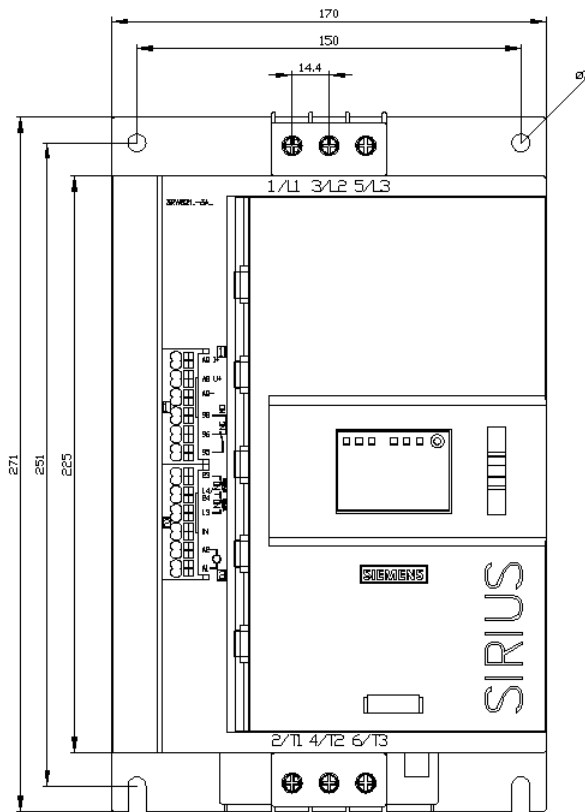



last modified:

8/10/2021 