



SIRIUS soft starter 200-600 V 38 A, 24 V AC/DC Screw terminals
Thermistor input

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW52
manufacturer's article number	<ul style="list-style-type: none">• of standard HMI module usable• of high feature HMI module usable• of communication module PROFINET standard usable• of communication module PROFIBUS usable• of communication module Modbus TCP usable• of communication module Modbus RTU usable• of communication module Ethernet/IP• of circuit breaker usable at 400 V• of circuit breaker usable at 500 V• of circuit breaker usable at 400 V at inside-delta circuit• of circuit breaker usable at 500 V at inside-delta circuit• of the gG fuse usable up to 690 V• of the gG fuse usable at inside-delta circuit up to 500 V• of full range R fuse link for semiconductor protection usable up to 690 V• of back-up R fuse link for semiconductor protection usable up to 690 V
General technical data	
starting voltage [%]	30 ... 100 %
stopping voltage [%]	50 ... 50 %
start-up ramp time of soft starter	0 ... 20 s
current limiting value [%] adjustable	130 ... 700 %
certificate of suitability	<ul style="list-style-type: none">• CE marking• UL approval• CSA approval
product component is supported	<ul style="list-style-type: none">• HMI-Standard• HMI-High Feature
product feature integrated bypass contact system	












3RW5980-0HS00
3RW5980-0HF00
3RW5980-0CS00
3RW5980-0CP00
3RW5980-0CT00
3RW5980-0CR00
3RW5980-0CE00
3RV2032-4WA10: Type of coordination 1, Iq = 65 kA, CLASS 10
3RV2032-4WA10: Type of coordination 1, Iq = 10 kA, CLASS 10
3RV2032-4RA10: Type of coordination 1, Iq = 65 kA, CLASS 10
3RV2032-4RA10: Type of coordination 1, Iq = 10 kA, CLASS 10
3NA3824-6: Type of coordination 1, Iq = 65 kA
3NA3824-6: Type of coordination 1, Iq = 65 kA
3NE1820-0: Type of coordination 2, Iq = 65 kA
3NE8024-1: Type of coordination 2, Iq = 65 kA

number of controlled phases	3
trip class	CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
• for main current circuit	100 ms
• for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category acc. to IEC 60947-4-2	AC 53a
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	15.02.2018 00:00:00
product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• Soft Torque	Yes
• adjustable current limitation	Yes
• pump ramp down	Yes
• intrinsic device protection	Yes
• motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
• evaluation of thermistor motor protection	Yes; Type A PTC or Klaxon / Thermoclick
• inside-delta circuit	Yes
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
• communication function	Yes
• operating measured value display	Yes; Only in conjunction with special accessories
• error logbook	Yes; Only in conjunction with special accessories
• via software parameterizable	No
• via software configurable	Yes
• PROFenergy	Yes; in connection with the PROFINET Standard communication module
• firmware update	Yes
• removable terminal for control circuit	Yes
• torque control	No
• analog output	No
Power Electronics	
operational current	
• at 40 °C rated value	38 A
• at 50 °C rated value	34 A
• at 60 °C rated value	31 A
operational current at inside-delta circuit	
• at 40 °C rated value	65.8 A
• at 50 °C rated value	58 A
• at 60 °C rated value	52.8 A
operating voltage	
• rated value	200 ... 600 V
• at inside-delta circuit rated value	200 ... 600 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %

relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	11 kW
• at 230 V at inside-delta circuit at 40 °C rated value	18.5 kW
• at 400 V at 40 °C rated value	18.5 kW
• at 400 V at inside-delta circuit at 40 °C rated value	30 kW
• at 500 V at 40 °C rated value	22 kW
• at 500 V at inside-delta circuit at 40 °C rated value	37 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
• at rotary coding switch on switch position 1	15.5 A
• at rotary coding switch on switch position 2	17 A
• at rotary coding switch on switch position 3	18.5 A
• at rotary coding switch on switch position 4	20 A
• at rotary coding switch on switch position 5	21.5 A
• at rotary coding switch on switch position 6	23 A
• at rotary coding switch on switch position 7	24.5 A
• at rotary coding switch on switch position 8	26 A
• at rotary coding switch on switch position 9	27.5 A
• at rotary coding switch on switch position 10	29 A
• at rotary coding switch on switch position 11	30.5 A
• at rotary coding switch on switch position 12	32 A
• at rotary coding switch on switch position 13	33.5 A
• at rotary coding switch on switch position 14	35 A
• at rotary coding switch on switch position 15	36.5 A
• at rotary coding switch on switch position 16	38 A
• minimum	15.5 A
adjustable motor current	
• for inside-delta circuit at rotary coding switch on switch position 1	26.8 A
• for inside-delta circuit at rotary coding switch on switch position 2	29.4 A
• for inside-delta circuit at rotary coding switch on switch position 3	32 A
• for inside-delta circuit at rotary coding switch on switch position 4	34.6 A
• for inside-delta circuit at rotary coding switch on switch position 5	37.2 A
• for inside-delta circuit at rotary coding switch on switch position 6	39.8 A
• for inside-delta circuit at rotary coding switch on switch position 7	42.4 A
• for inside-delta circuit at rotary coding switch on switch position 8	45 A
• for inside-delta circuit at rotary coding switch on switch position 9	47.6 A
• for inside-delta circuit at rotary coding switch on switch position 10	50.2 A
• for inside-delta circuit at rotary coding switch on switch position 11	52.8 A
• for inside-delta circuit at rotary coding switch on switch position 12	55.4 A
• for inside-delta circuit at rotary coding switch on switch position 13	58 A
• for inside-delta circuit at rotary coding switch on switch position 14	60.6 A
• for inside-delta circuit at rotary coding switch on switch position 15	63.2 A

<ul style="list-style-type: none"> • for inside-delta circuit at rotary coding switch on switch position 16 • at inside-delta circuit minimum 	65.8 A 26.8 A
minimum load [%]	15 %; Relative to smallest settable I _e
power loss [W] for rated value of the current at AC <ul style="list-style-type: none"> • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup 	23 W 22 W 21 W
power loss [W] at AC at current limitation 350 % <ul style="list-style-type: none"> • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup 	628 W 526 W 464 W
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value 	24 V 24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 ... 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage <ul style="list-style-type: none"> • at DC rated value 	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	160 mA
holding current in bypass operation rated value	360 mA
locked-rotor current at close of bypass contact maximum	0.75 A
inrush current peak at application of control supply voltage maximum	3.3 A
duration of inrush current peak at application of control supply voltage	12.1 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (I _{cu} =1 kA), 6 A quick-acting fuse (I _{cu} =1 kA), C1 miniature circuit breaker (I _{cu} = 600 A), C6 miniature circuit breaker (I _{cu} = 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of inputs for thermistor connection	1; Type A PTC or Klaxon / Thermoclick
number of digital outputs <ul style="list-style-type: none"> • not parameterizable 	3 2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	0
switching capacity current of the relay outputs <ul style="list-style-type: none"> • at AC-15 at 250 V rated value • at DC-13 at 24 V rated value 	3 A 1 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing

height	275 mm
width	170 mm
depth	152 mm
required spacing with side-by-side mounting	
<ul style="list-style-type: none"> • forwards • backwards • upwards • downwards • at the side 	10 mm 0 mm 100 mm 75 mm 5 mm
weight without packaging	2.3 kg
Connections/ Terminals	
type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit • for control circuit 	screw-type terminals screw-type terminals
wire length for thermistor connection	
<ul style="list-style-type: none"> • with conductor cross-section = 0.5 mm² maximum • with conductor cross-section = 1.5 mm² maximum • with conductor cross-section = 2.5 mm² maximum 	50 m 150 m 250 m
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing • at AWG cables for main current circuit solid 	2x (1.0 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) 2x (1.0 ... 2.5 mm ²), 2x (2.5 ... 6.0 mm ²) 2x (16 ... 12), 2x (14 ... 8)
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for control circuit solid • for control circuit finely stranded with core end processing • at AWG cables for control circuit solid 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) 1x (20 ... 12), 2x (20 ... 14)
wire length	
<ul style="list-style-type: none"> • between soft starter and motor maximum • at the digital inputs at AC maximum • at the digital inputs at DC maximum 	800 m 100 m 1 000 m
tightening torque	
<ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	2 ... 2.5 N·m 0.8 ... 1.2 N·m
tightening torque [lbf·in]	
<ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	18 ... 22 lbf·in 7 ... 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
<ul style="list-style-type: none"> • during operation • during storage and transport 	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above -40 ... +80 °C
environmental category	
<ul style="list-style-type: none"> • during operation acc. to IEC 60721 • during storage acc. to IEC 60721 • during transport acc. to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
<ul style="list-style-type: none"> • PROFINET standard • EtherNet/IP • Modbus RTU • Modbus TCP 	Yes Yes Yes Yes

• PROFIBUS		Yes
UL/CSA ratings		
manufacturer's article number		
• of circuit breaker		
— usable for Standard Faults at 460/480 V according to UL		Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA
— usable for High Faults at 460/480 V according to UL		Siemens type: 3RV2742, max. 40 A or 3VA51, max. 60 A; Iq max = 65 kA
— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL		Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA
— usable for High Faults at 460/480 V at inside-delta circuit according to UL		Siemens type: 3VA51, max. 60 A; Iq max = 65 kA
— usable for Standard Faults at 575/600 V according to UL		Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA
— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL		Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA
• of the fuse		
— usable for Standard Faults up to 575/600 V according to UL		Type: Class RK5 / K5, max. 150 A; Iq = 5 kA
— usable for High Faults up to 575/600 V according to UL		Type: Class J / L, max. 150 A; Iq = 100 kA
— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL		Type: Class RK5 / K5, max. 150 A; Iq = 5 kA
— usable for High Faults at inside-delta circuit up to 575/600 V according to UL		Type: Class J / L, max. 150 A; Iq = 100 kA
operating power [hp] for 3-phase motors		
• at 200/208 V at 50 °C rated value		10 hp
• at 220/230 V at 50 °C rated value		10 hp
• at 460/480 V at 50 °C rated value		20 hp
• at 575/600 V at 50 °C rated value		30 hp
• at 200/208 V at inside-delta circuit at 50 °C rated value		15 hp
• at 220/230 V at inside-delta circuit at 50 °C rated value		20 hp
• at 460/480 V at inside-delta circuit at 50 °C rated value		40 hp
• at 575/600 V at inside-delta circuit at 50 °C rated value		50 hp
contact rating of auxiliary contacts according to UL		R300-B300
Safety related data		
protection class IP on the front acc. to IEC 60529		IP20
touch protection on the front acc. to IEC 60529		finger-safe, for vertical contact from the front
electromagnetic compatibility		in accordance with IEC 60947-4-2
Certificates/ approvals		
General Product Approval		EMC
		Declaration of Conformity
		
		
		
Test Certificates		Marine / Shipping
Type Test Certificates/Test Report		
		
		
		
		
other		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5217-1TC05>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5217-1TC05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5217-1TC05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5217-1TC05&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5217-1TC05/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5217-1TC05&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

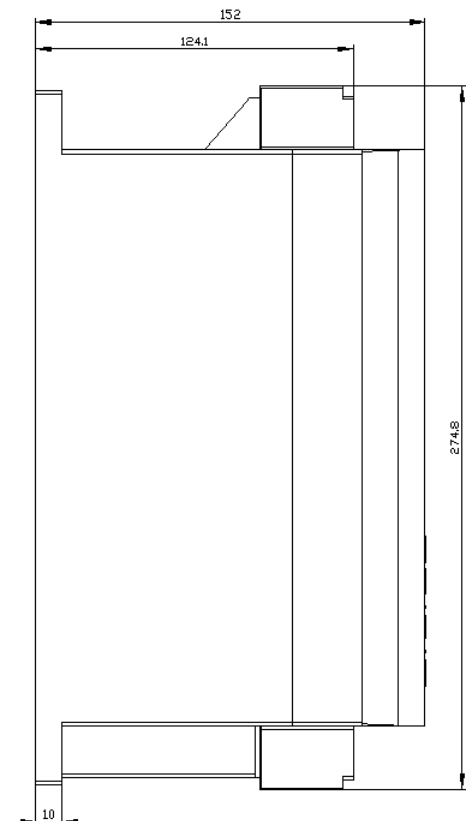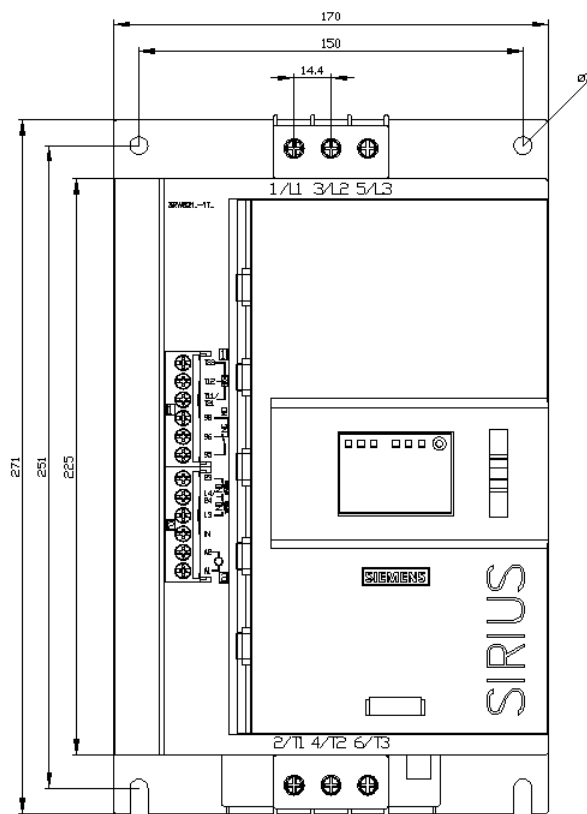



last modified:

8/10/2021