



SIRIUS soft starter 200-600 V 38 A, 24 V AC/DC spring-type terminals














|  |  |
|--|--|
| <b>product brand name</b>                    | SIRIUS   |
| <b>product category</b>                      | Hybrid switching devices   |
| <b>product designation</b>                   | Soft starter   |
| <b>product type designation</b>              | 3RW55  |
| <b>manufacturer's article number</b>         | <ul style="list-style-type: none"> <li>• of high feature HMI module usable <a href="#">3RW5980-0HF00</a></li> <li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li> <li>• of communication module PROFINET high-feature usable <a href="#">3RW5950-0CH00</a></li> <li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li> <li>• of communication module Modbus TCP usable <a href="#">3RW5980-0CT00</a></li> <li>• of communication module Modbus RTU usable <a href="#">3RW5980-0CR00</a></li> <li>• of communication module Ethernet/IP <a href="#">3RW5980-0CE00</a></li> <li>• of circuit breaker usable at 400 V <a href="#">3RV2032-4WA10; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V <a href="#">3RV2032-4WA10; Type of coordination 1, Iq = 10 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3RV2032-4RA10; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V at inside-delta circuit <a href="#">3RV2032-4RA10; Type of coordination 1, Iq = 10 kA, CLASS 10</a></li> <li>• of the gG fuse usable up to 690 V <a href="#">3NA3824-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of the gG fuse usable at inside-delta circuit up to 500 V <a href="#">3NA3824-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE1820-0; Type of coordination 2, Iq = 65 kA</a></li> <li>• of back-up R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE8024-1; Type of coordination 2, Iq = 65 kA</a></li> </ul> |
| <b>General technical data</b>                |  |
| <b>starting voltage [%]</b>                  | 20 ... 100 %   |
| <b>stopping voltage [%]</b>                  | 50 ... 50 %  |
| <b>start-up ramp time of soft starter</b>    | 0 ... 360 s  |
| <b>ramp-down time of soft starter</b>        | 0 ... 360 s  |
| <b>start torque [%]</b>                      | 10 ... 100 %   |
| <b>stopping torque [%]</b>                   | 10 ... 100 %   |
| <b>torque limitation [%]</b>                 | 20 ... 200 %   |
| <b>current limiting value [%] adjustable</b> | 125 ... 800 %  |
| <b>breakaway voltage [%] adjustable</b>      | 40 ... 100 %   |
| <b>breakaway time adjustable</b>             | 0 ... 2 s  |
| <b>number of parameter sets</b>              | 3  |

|   |  |
|---|--|
| <b>accuracy class acc. to IEC 61557-12</b>              | 5 %  |
| <b>certificate of suitability</b>                       |  |
| • CE marking  | Yes  |
| • UL approval   | Yes  |
| • CSA approval  | Yes  |
| <b>product component</b>                                |  |
| • HMI-High Feature                                      | Yes  |
| • is supported HMI-High Feature                         | Yes  |
| <b>product feature integrated bypass contact system</b> | Yes  |
| <b>number of controlled phases</b>                      | 3  |
| <b>trip class</b>                                       | CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2   |
| <b>current unbalance limiting value [%]</b>             | 10 ... 60 %  |
| <b>ground-fault monitoring limiting value [%]</b>       | 10 ... 95 %  |
| <b>recovery time after overload trip adjustable</b>     | 60 ... 1 800 s   |
| <b>buffering time in the event of power failure</b>     |  |
| • for main current circuit                              | 100 ms   |
| • for control circuit                                   | 100 ms   |
| <b>idle time adjustable</b>                             | 0 ... 255 s  |
| insulation voltage rated value                          | 600 V  |
| <b>degree of pollution</b>                              | 3, acc. to IEC 60947-4-2   |
| <b>impulse voltage rated value</b>                      | 6 kV   |
| <b>blocking voltage of the thyristor maximum</b>        | 1 600 V  |
| <b>service factor</b>                                   | 1.15   |
| <b>surge voltage resistance rated value</b>             | 6 kV   |
| <b>maximum permissible voltage for safe isolation</b>   |  |
| • between main and auxiliary circuit                    | 600 V; does not apply for thermistor connection  |
| <b>utilization category acc. to IEC 60947-4-2</b>       | AC 53a   |
| <b>shock resistance</b>                                 | 15 g / 11 ms, from 6 g / 11 ms with potential contact lifting  |
| <b>vibration resistance</b>                             | 15 mm up to 6 Hz; 2 g up to 500 Hz   |
| <b>reference code acc. to IEC 81346-2</b>               | Q  |
| Substance Prohibitance (Date)                           | 15.02.2018 00:00:00  |
| <b>product function</b>                                 |  |
| • ramp-up (soft starting)                               | Yes  |
| • ramp-down (soft stop)                                 | Yes  |
| • breakaway pulse                                       | Yes  |
| • adjustable current limitation                         | Yes  |
| • creep speed in both directions of rotation            | Yes  |
| • pump ramp down  | Yes  |
| • DC braking  | Yes  |
| • motor heating   | Yes  |
| • slave pointer function                                | Yes  |
| • trace function  | Yes  |
| • intrinsic device protection                           | Yes  |
| • motor overload protection                             | Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. |
| • evaluation of thermistor motor protection             | Yes; Type A PTC or Klixon / Thermoclick  |
| • inside-delta circuit                                  | Yes  |
| • auto-RESET  | Yes  |
| • manual RESET  | Yes  |
| • remote reset  | Yes  |
| • communication function                                | Yes  |
| • operating measured value display                      | Yes  |
| • event list  | Yes  |
| • error logbook   | Yes  |
| • via software parameterizable                          | Yes  |
| • via software configurable                             | Yes  |
| • screw terminal  | No   |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• spring-type terminal</li> <li>• <b>PROFInergy</b></li> </ul>   | Yes<br>Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules                                      |
| <ul style="list-style-type: none"> <li>• <b>firmware update</b></li> <li>• <b>removable terminal for control circuit</b></li> <li>• voltage ramp</li> <li>• torque control</li> <li>• combined braking</li> <li>• analog output</li> <li>• programmable control inputs/outputs</li> <li>• condition monitoring</li> <li>• automatic parameterisation</li> <li>• application wizards</li> <li>• alternative run-down</li> <li>• emergency operation mode</li> <li>• reversing operation</li> <li>• soft starting at heavy starting conditions</li> </ul> | Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes; 4 ... 20 mA (default) / 0 ... 10 V<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes<br>Yes |
| <b>Power Electronics</b>  |   |
| <b>operational current</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 40 °C rated value minimum</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>  | 38 A<br>7.5 A<br>33.5 A<br>30.5 A   |
| <b>operational current at inside-delta circuit</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>  | 65.8 A<br>58 A<br>52.8 A  |
| <b>operating voltage</b>  |   |
| <ul style="list-style-type: none"> <li>• rated value</li> <li>• at inside-delta circuit rated value</li> </ul>  | 200 ... 600 V<br>200 ... 600 V  |
| <b>relative negative tolerance of the operating voltage</b>   | -15 %   |
| <b>relative positive tolerance of the operating voltage</b>   | 10 %  |
| <b>relative negative tolerance of the operating voltage at inside-delta circuit</b>   | -15 %   |
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b>   | 10 %  |
| <b>operating power for 3-phase motors</b>   |   |
| <ul style="list-style-type: none"> <li>• at 230 V at 40 °C rated value</li> <li>• at 230 V at inside-delta circuit at 40 °C rated value</li> <li>• at 400 V at 40 °C rated value</li> <li>• at 400 V at inside-delta circuit at 40 °C rated value</li> <li>• at 500 V at 40 °C rated value</li> <li>• at 500 V at inside-delta circuit at 40 °C rated value</li> </ul>  | 11 kW<br>18.5 kW<br>18.5 kW<br>30 kW<br>22 kW<br>37 kW  |
| <b>Operating frequency 1 rated value</b>  | 50 Hz   |
| <b>Operating frequency 2 rated value</b>  | 60 Hz   |
| <b>relative negative tolerance of the operating frequency</b>   | -10 %   |
| <b>relative positive tolerance of the operating frequency</b>   | 10 %  |
| <b>minimum load [%]</b>   | 10 %; Relative to set Ie  |
| <b>power loss [W] for rated value of the current at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 40 °C after startup</li> <li>• at 50 °C after startup</li> <li>• at 60 °C after startup</li> </ul>  | 11 W<br>10 W<br>9 W   |
| <b>power loss [W] at AC at current limitation 350 %</b>   |   |
| <ul style="list-style-type: none"> <li>• at 40 °C during startup</li> <li>• at 50 °C during startup</li> <li>• at 60 °C during startup</li> </ul>   | 616 W<br>511 W<br>447 W   |
| <b>type of the motor protection</b>   | Electronic, tripping in the event of thermal overload of the motor  |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | AC/DC   |

|   |  |
|---|--|
| <b>control supply voltage at AC</b>   |  |
| • at 50 Hz rated value  | 24 V   |
| • at 60 Hz rated value  | 24 V   |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b> | -20 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b> | 20 %   |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b> | -20 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b> | 20 %   |
| <b>control supply voltage frequency</b>   | 50 ... 60 Hz   |
| <b>relative negative tolerance of the control supply voltage frequency</b>      | -10 %  |
| <b>relative positive tolerance of the control supply voltage frequency</b>      | 10 %   |
| <b>control supply voltage</b>   |  |
| • at DC rated value   | 24 V   |
| <b>relative negative tolerance of the control supply voltage at DC</b>          | -20 %  |
| <b>relative positive tolerance of the control supply voltage at DC</b>          | 20 %   |
| <b>control supply current in standby mode rated value</b>                       | 420 mA   |
| <b>holding current in bypass operation rated value</b>                          | 820 mA   |
| <b>locked-rotor current at close of bypass contact maximum</b>                  | 0.91 A   |
| <b>inrush current peak at application of control supply voltage maximum</b>     | 7.5 A  |
| <b>duration of inrush current peak at application of control supply voltage</b> | 20 ms  |
| <b>design of the overvoltage protection</b>                                     | Varistor   |
| <b>design of short-circuit protection for control circuit</b>                   | 4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply |
| <b>Inputs/ Outputs</b>  |  |
| <b>number of digital inputs</b>   | 4  |
| • parameterizable   | 4  |
| <b>number of inputs for thermistor connection</b>                               | 1; Type A PTC or Klixon / Thermoclick  |
| • <b>number of digital outputs</b>  | 4  |
| • number of digital outputs parameterizable                                     | 3  |
| • number of digital outputs not parameterizable                                 | 1  |
| <b>digital output version</b>   | 3 normally-open contacts (NO) / 1 changeover contact (CO)  |
| <b>number of analog outputs</b>   | 1  |
| <b>switching capacity current of the relay outputs</b>                          |  |
| • at AC-15 at 250 V rated value   | 3 A  |
| • at DC-13 at 24 V rated value  | 1 A  |
| <b>Installation/ mounting/ dimensions</b>                                       |  |
| <b>mounting position</b>  | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)   |
| <b>fastening method</b>   | screw fixing   |
| <b>height</b>   | 275 mm   |
| <b>width</b>  | 170 mm   |
| <b>depth</b>  | 152 mm   |
| <b>required spacing with side-by-side mounting</b>                              |  |
| • forwards  | 10 mm  |
| • backwards   | 0 mm   |
| • upwards   | 100 mm   |
| • downwards   | 75 mm  |
| • at the side   | 5 mm   |
| <b>weight without packaging</b>   | 2.6 kg   |
| <b>Connections/ Terminals</b>   |  |
| <b>type of electrical connection</b>  |  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for control circuit</li> </ul>   | screw-type terminals<br>spring-loaded terminals  |
| <b>wire length for thermistor connection</b> <ul style="list-style-type: none"> <li>• with conductor cross-section = 0.5 mm<sup>2</sup> maximum</li> <li>• with conductor cross-section = 1.5 mm<sup>2</sup> maximum</li> <li>• with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>  | 50 m<br>150 m<br>250 m   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main current circuit solid</li> </ul>  | 2x (1.0 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1.0 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6.0 mm <sup>2</sup> )<br>2x (16 ... 12), 2x (14 ... 8)   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for control circuit solid</li> <li>• for control circuit finely stranded with core end processing</li> <li>• at AWG cables for control circuit solid</li> <li>• at AWG cables for control circuit finely stranded with core end processing</li> </ul>  | 2x (0.25 ... 1.5 mm <sup>2</sup> )<br>2x (0.25 ... 1.5 mm <sup>2</sup> )<br><br>2x (24 ... 16)<br>2x (24 ... 16)   |
| <b>wire length</b> <ul style="list-style-type: none"> <li>• between soft starter and motor maximum</li> <li>• at the digital inputs at DC maximum</li> </ul>  | 800 m<br>1 000 m   |
| <b>Ambient conditions</b>   |  |
| installation altitude at height above sea level maximum   | 5 000 m; Derating as of 1000 m, see catalog  |
| <b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage and transport</li> </ul>   | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above<br>-25 ... +80 °C  |
| <b>environmental category</b> <ul style="list-style-type: none"> <li>• during operation acc. to IEC 60721</li> <li>• during storage acc. to IEC 60721</li> <li>• during transport acc. to IEC 60721</li> </ul>  | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6<br>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4<br>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)  |
| <b>EMC emitted interference</b>   | acc. to IEC 60947-4-2: Class A   |
| <b>Communication/ Protocol</b>  |  |
| <b>communication module is supported</b> <ul style="list-style-type: none"> <li>• PROFINET standard</li> <li>• PROFINET high-feature</li> <li>• EtherNet/IP</li> <li>• Modbus RTU</li> <li>• Modbus TCP</li> <li>• PROFIBUS</li> </ul>  | Yes<br>No<br>No<br>No<br>Yes<br>Yes  |
| <b>UL/CSA ratings</b>   |  |
| <b>manufacturer's article number</b> <ul style="list-style-type: none"> <li>• of circuit breaker               <ul style="list-style-type: none"> <li>— usable for Standard Faults at 460/480 V according to UL</li> <li>— usable for High Faults at 460/480 V according to UL</li> <li>— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>— usable for Standard Faults at 575/600 V according to UL</li> <li>— usable for High Faults at 575/600 V at inside-delta circuit according to UL</li> <li>— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> </ul> </li> <li>• of the fuse               <ul style="list-style-type: none"> <li>— usable for Standard Faults up to 575/600 V</li> </ul> </li> </ul> | Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA<br>Siemens type: 3RV2742, max.40 A or 3VA51, max. 60 A; Iq max = 65 kA<br>Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA<br>Siemens type: 3VA51, max. 60 A; Iq max = 65 kA<br>Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA<br>Siemens type: 3VA51, max. 60 A; Iq max = 65 kA<br>Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 5 kA<br>Type: Class RK5 / K5, max. 150 A; Iq = 5 kA |

|  |  |   |   |   |   |
|--|--|---|---|---|---|
| <p>according to UL</p> <ul style="list-style-type: none"> <li>— usable for High Faults up to 575/600 V according to UL</li> <li>— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> <li>— usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>  | <p>Type: Class J / L, max. 150 A; Iq = 100 kA</p> <p>Type: Class RK5 / K5, max. 150 A; Iq = 5 kA</p> <p>Type: Class J / L, max. 150 A; Iq = 100 kA</p> |   |   |   |   |
| <p><b>operating power [hp] for 3-phase motors</b></p> <ul style="list-style-type: none"> <li>• at 200/208 V at 50 °C rated value</li> <li>• at 220/230 V at 50 °C rated value</li> <li>• at 460/480 V at 50 °C rated value</li> <li>• at 575/600 V at 50 °C rated value</li> <li>• at 200/208 V at inside-delta circuit at 50 °C rated value</li> <li>• at 220/230 V at inside-delta circuit at 50 °C rated value</li> <li>• at 460/480 V at inside-delta circuit at 50 °C rated value</li> <li>• at 575/600 V at inside-delta circuit at 50 °C rated value</li> </ul> | <p>10 hp</p> <p>10 hp</p> <p>20 hp</p> <p>30 hp</p> <p>15 hp</p> <p>20 hp</p> <p>40 hp</p> <p>50 hp</p>  |   |   |   |   |
| <p><b>contact rating of auxiliary contacts according to UL</b></p>   | <p>R300-B300</p>   |   |   |   |   |
| <p><b>Safety related data</b></p>  |  |   |   |   |   |
| <p><b>protection class IP on the front acc. to IEC 60529</b></p>   | <p>IP20</p>  |   |   |   |   |
| <p><b>touch protection on the front acc. to IEC 60529</b></p>  | <p>finger-safe, for vertical contact from the front</p>  |   |   |   |   |
| <p><b>electromagnetic compatibility</b></p>  | <p>acc. to IEC 60947-4-2</p>   |   |   |   |   |
| <p><b>ATEX</b></p>   |  |   |   |   |   |
| <p><b>certificate of suitability</b></p> <ul style="list-style-type: none"> <li>• ATEX</li> <li>• IECEx</li> <li>• according to ATEX directive 2014/34/EU</li> </ul>   | <p>Yes</p> <p>Yes</p> <p>BVS 18 ATEX F 003 X</p>   |   |   |   |   |
| <p><b>type of protection according to ATEX directive 2014/34/EU</b></p>  | <p>II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]</p>  |   |   |   |   |
| <p><b>hardware fault tolerance acc. to IEC 61508 relating to ATEX</b></p>  | <p>0</p>   |   |   |   |   |
| <p><b>Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX</b></p>  | <p>SIL1</p>  |   |   |   |   |
| <p><b>Certificates/ approvals</b></p>  |  |   |   |   |   |
| <p>General Product Approval</p>  | <p>EMC</p>   | <p>For use in hazardous locations</p>   |   |   |   |
|   |   |  |  |  |  |
| <p>For use in hazardous locations</p>  | <p>Declaration of Conformity</p>   | <p>Test Certificates</p>  | <p>Marine / Shipping</p>  |   |   |
|   |   | <p><a href="#">Type Test Certificates/Test Report</a></p>                           |  |  |  |
| <p>Marine / Shipping</p>   |  | <p>other</p>  | <p><a href="#">Confirmation</a></p>   |   |   |
|   |   |   |   |   |   |

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5517-3HA05>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5517-3HA05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5517-3HA05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5517-3HA05&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5517-3HA05&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5517-3HA05/char>


Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5517-3HA05&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

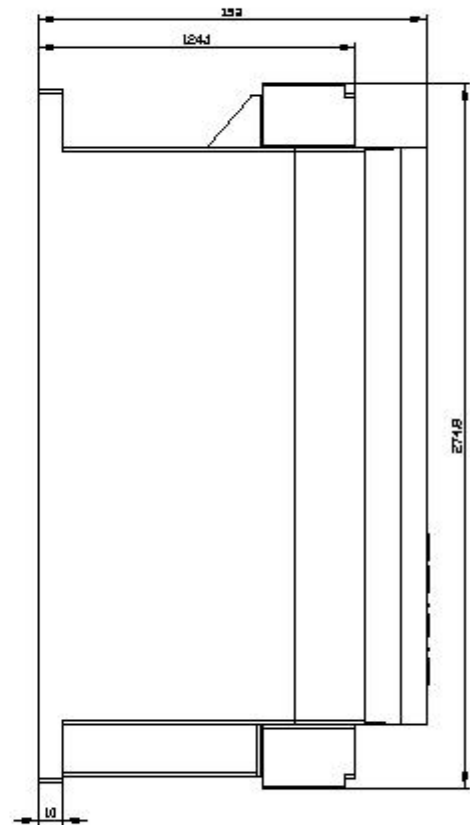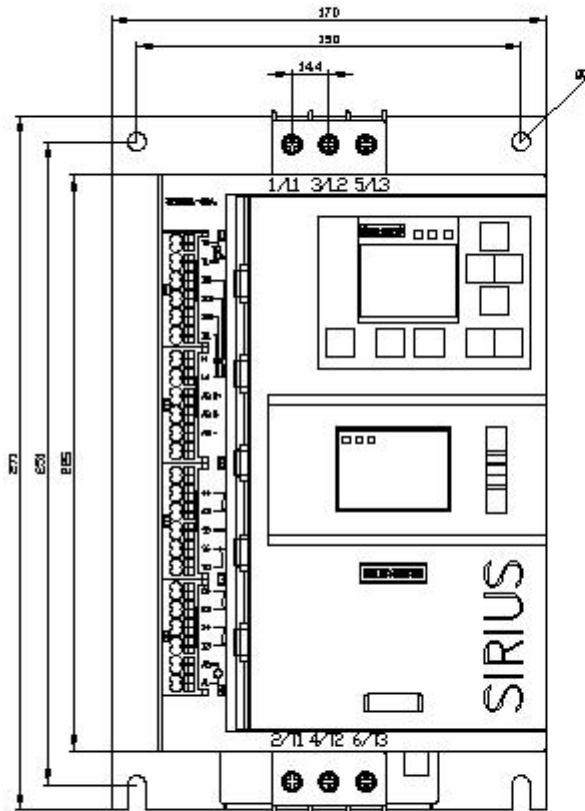

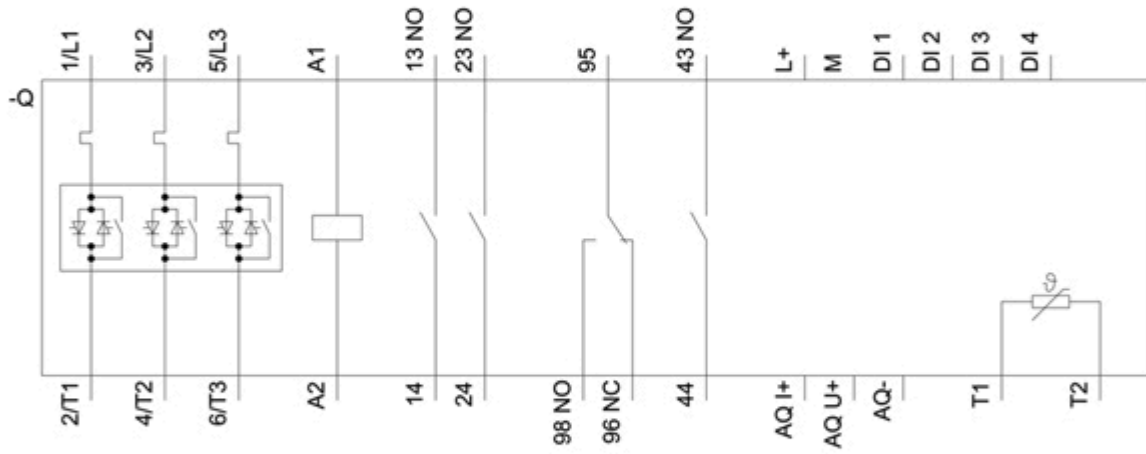

last modified:

3/9/2021 