SIEMENS

Data sheet 3RW5525-1HA14



SIRIUS soft starter 200-480 V 63 A, 110-250 V AC Screw terminals

| product brand name | SIRIUS | | |
|---|--|--|--|
| product category | Hybrid switching devices | | |
| product designation | Soft starter | | |
| product type designation | 3RW55 | | |
| manufacturer's article number | | | |
| of high feature HMI module usable | 3RW5980-0HF00 | | |
| of communication module PROFINET standard usable | 3RW5980-0CS00 | | |
| of communication module PROFINET high-feature usable | 3RW5950-0CH00 | | |
| of communication module PROFIBUS usable | 3RW5980-0CP00 | | |
| of communication module Modbus TCP usable | 3RW5980-0CT00 | | |
| of communication module Modbus RTU usable | 3RW5980-0CR00 | | |
| of communication module Ethernet/IP | 3RW5980-0CE00 | | |
| of circuit breaker usable at 400 V | 3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 | | |
| of circuit breaker usable at 500 V | 3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10 | | |
| of circuit breaker usable at 400 V at inside-delta circuit | 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 | | |
| of circuit breaker usable at 500 V at inside-delta circuit | 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 | | |
| of the gG fuse usable up to 690 V | 3NA3830-6; Type of coordination 1, Iq = 65 kA | | |
| of the gG fuse usable at inside-delta circuit up to 500 V | 3NA3830-6; Type of coordination 1, Iq = 65 kA | | |
| of full range R fuse link for semiconductor protection usable up to 690 V | 3NE1022-0; Type of coordination 2, Iq = 65 kA | | |
| of back-up R fuse link for semiconductor protection usable up to 690 V | 3NE3227; Type of coordination 2, Iq = 65 kA | | |

| General technical data | |
|---------------------------------------|-----------|
| starting voltage [%] | 20 100 % |
| stopping voltage [%] | 50 50 % |
| start-up ramp time of soft starter | 0 360 s |
| ramp-down time of soft starter | 0 360 s |
| start torque [%] | 10 100 % |
| stopping torque [%] | 10 100 % |
| torque limitation [%] | 20 200 % |
| current limiting value [%] adjustable | 125 800 % |
| breakaway voltage [%] adjustable | 40 100 % |
| breakaway time adjustable | 0 2 s |
| number of parameter sets | 3 |

| accuracy class acc. to IEC 61557-12 | 5 % | | | | |
|--|---|--|--|--|--|
| certificate of suitability | · · | | | | |
| CE marking | Yes | | | | |
| UL approval | Yes | | | | |
| CSA approval | Yes | | | | |
| product component | | | | | |
| HMI-High Feature | Yes | | | | |
| is supported HMI-High Feature | Yes | | | | |
| product feature integrated bypass contact system | Yes | | | | |
| number of controlled phases | 3 | | | | |
| trip class | CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2 | | | | |
| current unbalance limiting value [%] | 10 60 % | | | | |
| ground-fault monitoring limiting value [%] | 10 95 % | | | | |
| recovery time after overload trip adjustable | 60 1 800 s | | | | |
| buffering time in the event of power failure | | | | | |
| for main current circuit | 100 ms | | | | |
| for control circuit | 100 ms | | | | |
| idle time adjustable | 0 255 s | | | | |
| insulation voltage rated value | 480 V | | | | |
| degree of pollution | 3, acc. to IEC 60947-4-2 | | | | |
| impulse voltage rated value | 6 kV | | | | |
| blocking voltage of the thyristor maximum | 1 400 V | | | | |
| service factor | 1.15 | | | | |
| surge voltage resistance rated value | 6 kV | | | | |
| maximum permissible voltage for safe isolation | | | | | |
| between main and auxiliary circuit | 480 V; does not apply for thermistor connection | | | | |
| utilization category acc. to IEC 60947-4-2 | AC 53a | | | | |
| shock resistance | 15 g / 11 ms, from 6 g / 11 ms with potential contact lifting | | | | |
| vibration resistance | 15 mm up to 6 Hz; 2 g up to 500 Hz | | | | |
| | To this of the orange of the control | | | | |
| reference code acc. to IEC 81346-2 | Q | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) | | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function | Q 15.02.2018 00:00:00 | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) | Q 15.02.2018 00:00:00 Yes | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) | Q 15.02.2018 00:00:00 Yes Yes | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse | Q 15.02.2018 00:00:00 Yes Yes Yes | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation | Q 15.02.2018 00:00:00 Yes Yes Yes Yes | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation | Q 15.02.2018 00:00:00 Yes Yes Yes Yes | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET • manual RESET • remote reset | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET • manual RESET • remote reset • communication function | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET • manual RESET • remote reset • communication function • operating measured value display | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET • manual RESET • remote reset • communication function • operating measured value display • event list • error logbook | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET • manual RESET • remote reset • communication function • operating measured value display • event list • error logbook • via software parameterizable | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |
| reference code acc. to IEC 81346-2 Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET • manual RESET • remote reset • communication function • operating measured value display • event list • error logbook | Q 15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye | | | | |

| a chring type terminal | No | | | | |
|---|---|--|--|--|--|
| spring-type terminal PROFIGURATION | | | | | |
| PROFlenergy | Yes; in connection with the PROFINET Standard and PROFINET High- Feature communication modules | | | | |
| firmware update | Yes | | | | |
| removable terminal for control circuit | Yes | | | | |
| voltage ramp | | | | | |
| torque control | Yes | | | | |
| · | Yes | | | | |
| • combined braking | Yes | | | | |
| analog output | Yes; 4 20 mA (default) / 0 10 V | | | | |
| programmable control inputs/outputs | Yes | | | | |
| condition monitoring | Yes | | | | |
| automatic parameterisation | Yes | | | | |
| application wizards | Yes | | | | |
| alternative run-down | Yes | | | | |
| emergency operation mode | Yes | | | | |
| reversing operation | Yes | | | | |
| soft starting at heavy starting conditions | Yes | | | | |
| Power Electronics | | | | | |
| operational current | | | | | |
| at 40 °C rated value | 63 A | | | | |
| at 40 °C rated value minimum | 13 A | | | | |
| at 50 °C rated value | 55.5 A | | | | |
| at 60 °C rated value | 50.5 A | | | | |
| operational current at inside-delta circuit | | | | | |
| at 40 °C rated value | 109 A | | | | |
| at 50 °C rated value | 96 A | | | | |
| at 60 °C rated value | 87.5 A | | | | |
| operating voltage | | | | | |
| rated value | 200 480 V | | | | |
| at inside-delta circuit rated value | 200 480 V | | | | |
| relative negative tolerance of the operating voltage | -15 % | | | | |
| relative positive tolerance of the operating voltage | 10 % | | | | |
| relative negative tolerance of the operating voltage at | -15 % | | | | |
| inside-delta circuit | 40.0/ | | | | |
| rolative positive telegance of the energting voltage at | 10 % | | | | |
| relative positive tolerance of the operating voltage at inside-delta circuit | 10 /0 | | | | |
| inside-delta circuit | 10 70 | | | | |
| | 18.5 kW | | | | |
| inside-delta circuit operating power for 3-phase motors | | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value | 18.5 kW | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value | 18.5 kW 30 kW | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value | 18.5 kW 30 kW 30 kW | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value | 18.5 kW 30 kW 30 kW 55 kW | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value | 18.5 kW 30 kW 30 kW 55 kW | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value | 18.5 kW 30 kW 30 kW 55 kW 50 Hz | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency | 18.5 kW 30 kW 30 kW 55 kW 50 Hz 60 Hz -10 % | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency | 18.5 kW 30 kW 30 kW 55 kW 50 Hz 60 Hz -10 % | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] | 18.5 kW 30 kW 30 kW 55 kW 50 Hz 60 Hz -10 % | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC | 18.5 kW 30 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup | 18.5 kW 30 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le 19 W 17 W 15 W | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le 19 W 17 W 15 W | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 19 W 17 W 15 W 1 056 W 732 W 647 W | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 19 W 17 W 15 W 1 056 W 732 W | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 19 W 17 W 15 W 1 056 W 732 W 647 W Electronic, tripping in the event of thermal overload of the motor | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 19 W 17 W 15 W 1 056 W 732 W 647 W | | | | |
| inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup | 18.5 kW 30 kW 55 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 19 W 17 W 15 W 1 056 W 732 W 647 W Electronic, tripping in the event of thermal overload of the motor | | | | |

| t CO I I= | 440 050 \/ | | | | |
|---|--|--|--|--|--|
| • at 60 Hz | 110 250 V | | | | |
| relative negative tolerance of the control supply voltage at AC at 50 Hz | -15 % | | | | |
| relative positive tolerance of the control supply voltage at AC at 50 Hz | 10 % | | | | |
| relative negative tolerance of the control supply voltage at AC at 60 Hz | -15 % | | | | |
| relative positive tolerance of the control supply voltage at AC at 60 Hz | 10 % | | | | |
| control supply voltage frequency | 50 60 Hz | | | | |
| relative negative tolerance of the control supply voltage frequency | -10 % | | | | |
| relative positive tolerance of the control supply voltage frequency | 10 % | | | | |
| control supply current in standby mode rated value | 100 mA | | | | |
| holding current in bypass operation rated value | 180 mA | | | | |
| locked-rotor current at close of bypass contact | 0.8 A | | | | |
| maximum | | | | | |
| inrush current peak at application of control supply voltage maximum | 43 A | | | | |
| duration of inrush current peak at application of control supply voltage | 1.6 ms | | | | |
| design of the overvoltage protection | Varistor | | | | |
| design of short-circuit protection for control circuit | 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply | | | | |
| Inputs/ Outputs | | | | | |
| number of digital inputs | 4 | | | | |
| parameterizable | 4 | | | | |
| number of inputs for thermistor connection | | | | | |
| · . | 1; Type A PTC or Klixon / Thermoclick | | | | |
| number of digital outputs | 4 | | | | |
| number of digital outputs parameterizable | 3 | | | | |
| number of digital outputs not parameterizable | 1 | | | | |
| digital output version | 3 normally-open contacts (NO) / 1 changeover contact (CO) | | | | |
| number of analog outputs | 1 | | | | |
| switching capacity current of the relay outputs | | | | | |
| at AC-15 at 250 V rated value | 3 A | | | | |
| at DC-13 at 24 V rated value | 1 A | | | | |
| Installation/ mounting/ dimensions | | | | | |
| mounting position | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°) | | | | |
| fastening method | screw fixing | | | | |
| height | 306 mm | | | | |
| width | 185 mm | | | | |
| depth | 203 mm | | | | |
| required spacing with side-by-side mounting | | | | | |
| • forwards | 10 mm | | | | |
| backwards | 0 mm | | | | |
| • upwards | 100 mm | | | | |
| downwards | 75 mm | | | | |
| at the side | 5 mm | | | | |
| weight without packaging | 5.9 kg | | | | |
| Connections/ Terminals | | | | | |
| type of electrical connection | | | | | |
| for main current circuit | box terminal | | | | |
| for control circuit | screw-type terminals | | | | |
| width of connection bar maximum | 25 mm | | | | |
| | 25 mm | | | | |
| wire length for thermistor connection | 25 mm | | | | |
| wire length for thermistor connection • with conductor cross-section = 0.5 mm² maximum | 25 mm 50 m | | | | |
| | | | | | |
| • with conductor cross-section = 0.5 mm² maximum | 50 m | | | | |

| type of connectable conductor cross-sections | | | | | |
|--|---|--|--|--|--|
| for main contacts for box terminal using the front clamping point solid | 1x (2.5 16 mm²) | | | | |
| for main contacts for box terminal using the front clamping point finely stranded with core end processing | 1x (2.5 50 mm²) | | | | |
| for main contacts for box terminal using the front clamping point stranded | 1x (10 70 mm²) | | | | |
| at AWG cables for main contacts for box terminal using the front clamping point | 1x (10 2/0) | | | | |
| for main contacts for box terminal using the back clamping point solid | 1x (2.5 16 mm²) | | | | |
| at AWG cables for main contacts for box terminal using the back clamping point | 1x (10 2/0) | | | | |
| for main contacts for box terminal using both clamping points solid | 2x (2.5 16 mm²) | | | | |
| for main contacts for box terminal using both clamping points finely stranded with core end processing | 2x (2.5 35 mm²) | | | | |
| for main contacts for box terminal using both clamping points stranded | 2x (6 16 mm²), 2x (10 50 mm²) | | | | |
| for main contacts for box terminal using the back clamping point finely stranded with core end processing | 1x (2.5 50 mm²) | | | | |
| for main contacts for box terminal using the back clamping point stranded | 1x (10 70 mm²) | | | | |
| type of connectable conductor cross-sections | | | | | |
| for control circuit solid | 1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²) | | | | |
| for control circuit finely stranded with core end processing | 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) | | | | |
| at AWG cables for control circuit solid | 1x (20 12), 2x (20 14) | | | | |
| wire length | | | | | |
| between soft starter and motor maximum | 800 m | | | | |
| at the digital inputs at DC maximum | 1 000 m | | | | |
| tightening torque | | | | | |
| for main contacts with screw-type terminals | 4.5 6 N·m | | | | |
| for auxiliary and control contacts with screw-type terminals | 0.8 1.2 N·m | | | | |
| tightening torque [lbf·in] | | | | | |
| for main contacts with screw-type terminals | 40 53 lbf·in | | | | |
| for auxiliary and control contacts with screw-type terminals | 7 10.3 lbf·in | | | | |
| Ambient conditions | | | | | |
| installation altitude at height above sea level maximum | 5 000 m; Derating as of 1000 m, see catalog | | | | |
| ambient temperature | | | | | |
| during operation | -25 +60 °C; Please observe derating at temperatures of 40 °C or above | | | | |
| during storage and transport | -40 +80 °C | | | | |
| environmental category | | | | | |
| • during operation acc. to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 | | | | |
| during storage acc. to IEC 60721 | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 | | | | |
| during transport acc. to IEC 60721 | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) | | | | |
| EMC emitted interference | acc. to IEC 60947-4-2: Class A, Class B on request | | | | |
| Communication/ Protocol | | | | | |
| communication module is supported | | | | | |
| PROFINET standard | Yes | | | | |
| PROFINET high-feature | Yes | | | | |
| EtherNet/IP | Yes | | | | |
| Modbus RTU | Yes | | | | |
| Modbus TCP | Yes | | | | |
| PROFIBUS | Yes | | | | |
| - 1 1101 1500 | | | | | |

| UL/CSA ratings | | | | | |
|--|--|---------------------------|-------------------------------------|--|--|
| manufacturer's article number | | | | | |
| of circuit breaker | | | | | |
| usable for Standard Faults at 460/480 V according to UL | Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 10 kA | | | | |
| usable for High Faults at 460/480 V according to UL | Siemens type: 3VA51, max. 125 A; Iq max = 65 kA | | | | |
| usable for Standard Faults at 460/480 V at inside-delta circuit according to UL | Siemens type: 3VA51, max. 125 A; Iq = 10 kA | | | | |
| usable for High Faults at 460/480 V at inside- delta circuit according to UL | Siemens type: 3VA51, max. 125 A; Iq max = 65 kA | | | | |
| usable for Standard Faults at 575/600 V according to UL | Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; Iq = 10 kA | | | | |
| usable for High Faults at 575/600 V at inside- delta circuit according to UL | Siemens type: 3VA51, max. 125 A; Iq max = 65 kA | | | | |
| usable for Standard Faults at 575/600 V at inside-delta circuit according to UL | Siemens type: 3VA51, max. 125 A; Iq = 10 kA | | | | |
| of the fuse | | | | | |
| usable for Standard Faults up to 575/600 V according to UL | Type: Class RK5 / K5, max. 200 A; Iq = 10 kA | | | | |
| usable for High Faults up to 575/600 V according to UL | Type: Class J / L, max. 225 A; Iq = 100 kA | | | | |
| usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL | Type: Class RK5 / K5, max. 200 A; Iq = 10 kA | | | | |
| — usable for High Faults at inside-delta circuit up to 575/600 V according to UL | Type: Class J / L, max. 225 A; Iq = 100 kA | | | | |
| operating power [hp] for 3-phase motors | | | | | |
| at 200/208 V at 50 °C rated value | 15 hp | | | | |
| at 220/230 V at 50 °C rated value | 20 hp | | | | |
| at 460/480 V at 50 °C rated value | 40 hp | | | | |
| at 200/208 V at inside-delta circuit at 50 °C rated value | 30 hp | | | | |
| at 220/230 V at inside-delta circuit at 50 °C rated value | 30 hp | | | | |
| at 460/480 V at inside-delta circuit at 50 °C rated value | 75 hp | | | | |
| contact rating of auxiliary contacts according to UL | R300-B300 | | | | |
| Safety related data | | | | | |
| protection class IP on the front acc. to IEC 60529 | IP00; IP20 with cover | | | | |
| touch protection on the front acc. to IEC 60529 | finger-safe, for vertical conta | ct from the front with co | over | | |
| electromagnetic compatibility | acc. to IEC 60947-4-2 | | | | |
| ATEX | | | | | |
| certificate of suitability | | | | | |
| • ATEX | Yes | | | | |
| • IECEx | Yes | | | | |
| according to ATEX directive 2014/34/EU | BVS 18 ATEX F 003 X | | | | |
| type of protection according to ATEX directive 2014/34/EU | II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb] | | | | |
| hardware fault tolerance acc. to IEC 61508 relating to ATEX | 0 | | | | |
| PFDavg with low demand rate acc. to IEC 61508 relating to ATEX | 0.008 | | | | |
| PFHD with high demand rate acc. to EN 62061 relating to ATEX | 0.0000005 1/h | | | | |
| Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX | SIL1 | | | | |
| T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX | 3 y | | | | |
| Certificates/ approvals | | | | | |
| General Product Approval | | EMC | For use in hazard- ous locations | | |
| | | | | | |













For use in hazardous locations Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report







Marine / Shipping

other





Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5525-1HA14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5525-1HA14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5525-1HA14

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5525-1HA14&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5525-1HA14/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5525-1HA14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

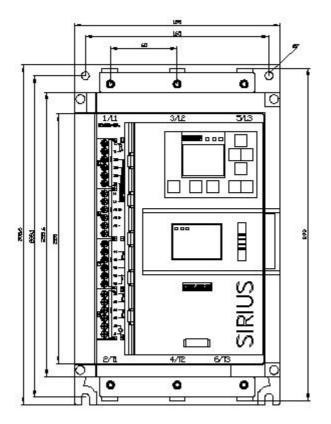

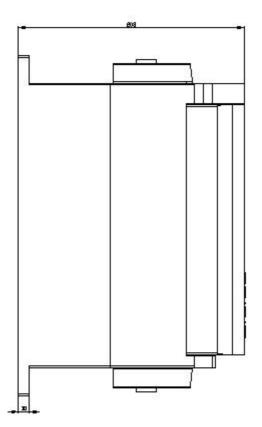

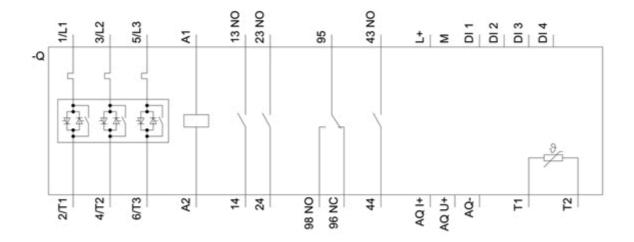

last modified: 3/9/2021 🖸