## SIEMENS

## Data sheet

## 3RW5534-2HA14



SIRIUS soft starter 200-480 V 113 A, 110-250 V AC spring-type terminals

product brand name	SIRIUS			
product category	Hybrid switching devices Soft starter			
product designation	3RW55			
product type designation	3RW55			
manufacturer's article number				
of high feature HMI module usable	<u>3RW5980-0HF00</u>			
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>			
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	<u>3RW5950-0CH00</u>			
<ul> <li>of communication module PROFIBUS usable</li> </ul>	<u>3RW5980-0CP00</u>			
<ul> <li>of communication module Modbus TCP usable</li> </ul>	<u>3RW5980-0CT00</u>			
<ul> <li>of communication module Modbus RTU usable</li> </ul>	<u>3RW5980-0CR00</u>			
<ul> <li>of communication module Ethernet/IP</li> </ul>	<u>3RW5980-0CE00</u>			
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2216-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10			
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2220-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10			
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	3NA3244-6; Type of coordination 1, Iq = 65 kA			
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	<u>3NA3244-6; Type of coordination 1, Iq = 65 kA</u>			
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1225-0: Type of coordination 2, Iq = 65 kA</u>			
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE3231; Type of coordination 2, Iq = 65 kA</u>			
General technical data				
starting voltage [%]	20 100 %			
stopping voltage [%]	50 50 %			
start-up ramp time of soft starter	0 360 s			
ramp-down time of soft starter	0 360 s			
start torque [%]	10 100 %			
stopping torque [%]	10 100 %			
torque limitation [%]	20 200 %			
current limiting value [%] adjustable	125 800 %			
breakaway voltage [%] adjustable	40 100 %			
breakaway time adjustable	0 2 s			
number of parameter sets	3			
accuracy class acc. to IEC 61557-12	5 %			
certificate of suitability				
CE marking	Yes			

	Vee				
UL approval	Yes				
CSA approval	Yes				
product component	Mar.				
• HMI-High Feature	Yes				
is supported HMI-High Feature	Yes Vos				
product feature integrated bypass contact system	Yes				
number of controlled phases	3				
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2				
current unbalance limiting value [%]	10 60 %				
ground-fault monitoring limiting value [%]	10 95 %				
recovery time after overload trip adjustable	60 1 800 s				
buffering time in the event of power failure	100				
• for main current circuit	100 ms				
for control circuit	100 ms				
idle time adjustable	0 255 s				
insulation voltage rated value	480 V				
degree of pollution	3, acc. to IEC 60947-4-2				
impulse voltage rated value	6 kV				
blocking voltage of the thyristor maximum	1 400 V				
service factor	1.15				
surge voltage resistance rated value	6 kV				
maximum permissible voltage for safe isolation					
between main and auxiliary circuit	480 V; does not apply for thermistor connection				
utilization category acc. to IEC 60947-4-2	AC 53a				
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting				
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz				
reference code acc. to IEC 81346-2	Q				
Substance Prohibitance (Date)	15.02.2018 00:00:00				
product function					
<ul> <li>ramp-up (soft starting)</li> </ul>	Yes				
<ul> <li>ramp-down (soft stop)</li> </ul>	Yes				
<ul> <li>breakaway pulse</li> </ul>	Yes				
<ul> <li>adjustable current limitation</li> </ul>	Yes				
<ul> <li>creep speed in both directions of rotation</li> </ul>	Yes				
<ul> <li>pump ramp down</li> </ul>	Yes				
<ul> <li>DC braking</li> </ul>	Yes				
<ul> <li>motor heating</li> </ul>	Yes				
<ul> <li>slave pointer function</li> </ul>	Yes				
trace function	Yes				
<ul> <li>intrinsic device protection</li> </ul>	Yes				
<ul> <li>motor overload protection</li> </ul>	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.				
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick				
<ul> <li>inside-delta circuit</li> </ul>	Yes				
auto-RESET	Yes				
manual RESET	Yes				
remote reset	Yes				
<ul> <li>communication function</li> </ul>	Yes				
<ul> <li>operating measured value display</li> </ul>	Yes				
event list	Yes				
error logbook	Yes				
<ul> <li>via software parameterizable</li> </ul>	Yes				
<ul> <li>via software configurable</li> </ul>	Yes				
screw terminal	No				
spring-type terminal	Yes				
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-				
	Feature communication modules				

<b>.</b>					
<ul> <li>firmware update</li> </ul>	Yes				
<ul> <li>removable terminal for control circuit</li> </ul>	Yes				
<ul> <li>voltage ramp</li> </ul>	Yes				
torque control	Yes				
<ul> <li>combined braking</li> </ul>	Yes				
<ul> <li>analog output</li> </ul>	Yes; 4 20 mA (default) / 0 10 V				
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes				
<ul> <li>condition monitoring</li> </ul>	Yes				
<ul> <li>automatic parameterisation</li> </ul>	Yes				
<ul> <li>application wizards</li> </ul>	Yes				
<ul> <li>alternative run-down</li> </ul>	Yes				
<ul> <li>emergency operation mode</li> </ul>	Yes				
<ul> <li>reversing operation</li> </ul>	Yes				
<ul> <li>soft starting at heavy starting conditions</li> </ul>	Yes				
Power Electronics					
operational current					
<ul> <li>at 40 °C rated value</li> </ul>	113 A				
• at 40 °C rated value minimum	23 A				
<ul> <li>at 50 °C rated value</li> </ul>	101 A				
• at 60 °C rated value	89 A				
operational current at inside-delta circuit					
at 40 °C rated value	196 A				
at 50 °C rated value	175 A				
at 60 °C rated value	154 A				
operating voltage					
rated value	200 480 V				
<ul> <li>at inside-delta circuit rated value</li> </ul>	200 480 V				
relative negative tolerance of the operating voltage	-15 %				
relative positive tolerance of the operating voltage	10 %				
relative negative tolerance of the operating voltage at	-15 %				
inside-delta circuit					
inside-delta circuit relative positive tolerance of the operating voltage at	10 %				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit	10 %				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors					
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value	30 kW				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value	30 kW 55 kW				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value	30 kW 55 kW 55 kW				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value	30 kW 55 kW 55 kW 110 kW				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value	30 kW 55 kW 55 kW 110 kW 50 Hz				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 %				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 %				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 0 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 %				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 0 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W 30 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at of °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 %	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le 34 W 30 W 27 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %, Relative to set le 34 W 30 W 27 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 50 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W 1 074 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 % 10 %; Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W 1 074 W Electronic, tripping in the event of thermal overload of the motor				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup • at 50 °C during startup • at 60 °C during sta	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W 1 074 W				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during sta	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W 1 074 W Electronic, tripping in the event of thermal overload of the motor				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 0 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W 1 074 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup • at 50 °C during startup • at 60 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W 1 074 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 0 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup	30 kW 55 kW 55 kW 110 kW 50 Hz 60 Hz -10 % 10 % Relative to set le 34 W 30 W 27 W 1 500 W 1 279 W 1 074 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V				

relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %			
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %			
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %			
control supply voltage frequency	50 60 Hz			
relative negative tolerance of the control supply	-10 %			
voltage frequency				
relative positive tolerance of the control supply voltage frequency	10 %			
control supply current in standby mode rated value	100 mA			
holding current in bypass operation rated value	180 mA			
locked-rotor current at close of bypass contact maximum	0.8 A			
inrush current peak at application of control supply voltage maximum	43 A			
duration of inrush current peak at application of control supply voltage	1.6 ms			
design of the overvoltage protection	Varistor			
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply			
Inputs/ Outputs				
number of digital inputs	4			
parameterizable	4			
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick			
number of digital outputs	4			
<ul> <li>number of digital outputs parameterizable</li> </ul>	3			
<ul> <li>number of digital outputs not parameterizable</li> </ul>	1			
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)			
number of analog outputs	1			
switching capacity current of the relay outputs				
<ul> <li>at AC-15 at 250 V rated value</li> </ul>	3 A			
at DC-13 at 24 V rated value	1 A			
Installation/ mounting/ dimensions				
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)			
fastening method	screw fixing			
	· · · · · · · · · · · · · · · · · · ·			
fastening method	screw fixing			
fastening method height	screw fixing 306 mm			
fastening method height width depth	screw fixing 306 mm 185 mm			
fastening method height width	screw fixing 306 mm 185 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting	screw fixing 306 mm 185 mm 203 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards	screw fixing 306 mm 185 mm 203 mm 10 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for main current circuit	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for main current circuit         • for control circuit	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection spring-loaded terminals			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for control circuit         width of connection bar maximum	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for control circuit         • for control circuit         width of connection bar maximum         wire length for thermistor connection	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection spring-loaded terminals 25 mm			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for control circuit         width of connection bar maximum         wire length for thermistor connection         • with conductor cross-section = 0.5 mm <sup>2</sup> maximum	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection spring-loaded terminals 25 mm 50 m			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for control circuit         width of connection bar maximum         wire length for thermistor connection         • with conductor cross-section = 0.5 mm² maximum         • with conductor cross-section = 1.5 mm² maximum	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection spring-loaded terminals 25 mm 50 m 150 m			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for control circuit         width of connection bar maximum         wire length for thermistor connection         • with conductor cross-section = 0.5 mm² maximum         • with conductor cross-section = 2.5 mm² maximum	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection spring-loaded terminals 25 mm 50 m			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for control circuit         width of connection bar maximum         wire length for thermistor connection         • with conductor cross-section = 0.5 mm² maximum         • with conductor cross-section = 2.5 mm² maximum         • with conductor cross-section = 2.5 mm² maximum         • with conductor cross-section = 2.5 mm² maximum	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 75 mm 5 mm 6.85 kg			
fastening method         height         width         depth         required spacing with side-by-side mounting         • forwards         • backwards         • upwards         • downwards         • at the side         weight without packaging         Connections/ Terminals         type of electrical connection         • for main current circuit         • for control circuit         width of connection bar maximum         wire length for thermistor connection         • with conductor cross-section = 0.5 mm² maximum         • with conductor cross-section = 2.5 mm² maximum	screw fixing 306 mm 185 mm 203 mm 10 mm 0 mm 100 mm 100 mm 75 mm 5 mm 6.85 kg busbar connection spring-loaded terminals 25 mm 50 m 150 m			

type of connectable conductor cross-sections				
<ul> <li>for control circuit solid</li> </ul>	2x (0.25 1.5 mm²)			
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	2x (0.25 1.5 mm²)			
<ul> <li>at AWG cables for control circuit solid</li> </ul>	2x (24 16)			
<ul> <li>at AWG cables for control circuit finely stranded with</li> </ul>	2x (24 16)			
core end processing				
wire length				
between soft starter and motor maximum	800 m			
tightening torque	1 000 m			
<ul> <li>for main contacts with screw-type terminals</li> </ul>	10 14 N·m			
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	10 14 N·m 0.8 1.2 N·m			
terminals	0.0 1.2 N°III			
tightening torque [lbf·in]				
<ul> <li>for main contacts with screw-type terminals</li> </ul>	89 124 lbf·in			
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	7 10.3 lbf·in			
Ambient conditions				
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog			
ambient temperature				
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above			
<ul> <li>during storage and transport</li> </ul>	-40 +80 °C			
environmental category				
<ul> <li>during operation acc. to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6			
during storage acc. to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand mus not get inside the devices), 1M4			
<ul> <li>during transport acc. to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)			
EMC emitted interference	acc. to IEC 60947-4-2: Class A			
Communication/ Protocol				
communication module is supported				
communication module is supported • PROFINET standard	Yes			
communication module is supported • PROFINET standard • PROFINET high-feature	Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP	Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU	Yes Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP	Yes Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS	Yes Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP	Yes Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings	Yes Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V	Yes Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker	Yes Yes Yes Yes			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V according	Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V according to UL — usable for Standard Faults at 460/480 V at	Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA			
communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-	Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA			
communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside- delta circuit according to UL — usable for Standard Faults at 575/600 V according to UL — usable for High Faults at 575/600 V at inside- delta circuit according to UL	Yes Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA			
<ul> <li>communication module is supported         <ul> <li>PROFINET standard</li> <li>PROFINET high-feature</li> <li>EtherNet/IP</li> <li>Modbus RTU</li> <li>Modbus TCP</li> <li>PROFIBUS</li> </ul> </li> <li>UL/CSA ratings         <ul> <li>manufacturer's article number</li> <li>of circuit breaker</li> <li>usable for Standard Faults at 460/480 V according to UL</li> <li>usable for High Faults at 460/480 V according to UL</li> <li>usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V according to UL</li> <li>usable for High Faults at 575/600 V at inside-</li> </ul> </li> </ul>	Yes Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA			
communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker - usable for Standard Faults at 460/480 V according to UL - usable for High Faults at 460/480 V at inside-delta circuit according to UL - usable for Standard Faults at 460/480 V at inside-delta circuit according to UL - usable for High Faults at 460/480 V at inside-delta circuit according to UL - usable for High Faults at 460/480 V at inside- delta circuit according to UL - usable for High Faults at 575/600 V according to UL - usable for High Faults at 575/600 V at inside- delta circuit according to UL - usable for Standard Faults at 575/600 V at inside- delta circuit according to UL - usable for Standard Faults at 575/600 V at inside- delta circuit according to UL - usable for Standard Faults at 575/600 V at inside- delta circuit according to UL	Yes Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA			
communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker 	Yes Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA			
<ul> <li>communication module is supported <ul> <li>PROFINET standard</li> <li>PROFINET high-feature</li> <li>EtherNet/IP</li> <li>Modbus RTU</li> <li>Modbus TCP</li> <li>PROFIBUS</li> </ul> </li> <li>UL/CSA ratings <ul> <li>manufacturer's article number</li> <li>of circuit breaker</li> <li>usable for Standard Faults at 460/480 V according to UL</li> <li>usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V according to UL</li> <li>usable for High Faults at 575/600 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> </ul> </li> </ul>	Yes Yes Yes Yes Yes Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq = 10 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA Siemens type: 3VA52, max. 250 A; lq max = 65 kA			

circuit up to 575/600 V according to UL					
<ul> <li>— usable for High Faults at inside-delta circu to 575/600 V according to UL</li> </ul>	it up	Type: Class J / L, max. 350 A; Iq = 100 kA			
operating power [hp] for 3-phase motors					
<ul> <li>at 200/208 V at 50 °C rated value</li> </ul>		30 hp			
<ul> <li>at 220/230 V at 50 °C rated value</li> </ul>		30 hp			
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>		75 hp			
<ul> <li>at 200/208 V at inside-delta circuit at 50 °C rate value</li> </ul>	ed	50 hp			
<ul> <li>at 220/230 V at inside-delta circuit at 50 °C rate value</li> </ul>	ed	60 hp			
<ul> <li>at 460/480 V at inside-delta circuit at 50 °C rate value</li> </ul>	ed	125 hp			
contact rating of auxiliary contacts according to L	JL	R300-B300			
Safety related data					
protection class IP on the front acc. to IEC 60529		IP00; IP20 with cover			
touch protection on the front acc. to IEC 60529		finger-safe, for vertical conta	ict from the front with	cover	
electromagnetic compatibility	_	acc. to IEC 60947-4-2			
ATEX	-				
certificate of suitability	_				
ATEX		Yes			
• IECEX		Yes			
according to ATEX directive 2014/34/EU		BVS 18 ATEX F 003 X			
type of protection according to ATEX directive 2014/34/EU		II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]			
hardware fault tolerance acc. to IEC 61508 relating	g to				
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	FDavg with low demand rate acc. to IEC 61508 0.008				
PFHD with high demand rate acc. to EN 62061 relating 0.0000005 1/h 0.0000005 1/h					
	Safety Integrity Level (SIL) acc. to IEC 61508 relating SIL1				
T1 value for proof test interval or service life acc. IEC 61508 relating to ATEX	to	3 у			
Certificates/ approvals					
General Product Approval			EMC	For use in hazard- ous locations	
E m	$\frown$	rnr	A	IECE	
	۹D	ŁHL		IECEX	
cm cc	01			ILL.	
For use in hazard- Declaration of					
ous locations Conformity Test C	Certificat	tes Marine / Shipping			
	<u>Test Cert</u> Test Rep			Lloyds	
ATEX EG-Konf.	·	ABS	BUREAU	us	
			VERITAS		
Marine / Shipping other					
	nfirmatior	ב			
PRS Divid.com/					

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5534-2HA14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5534-2HA14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5534-2HA14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5534-2HA14&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RW5534-2HA14/char

Characteristic: Installation altitude

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5534-2HA14&objecttype=14&gridview=view1 Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

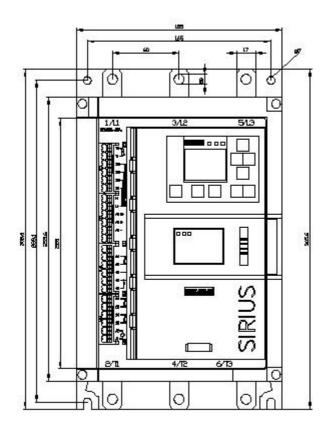

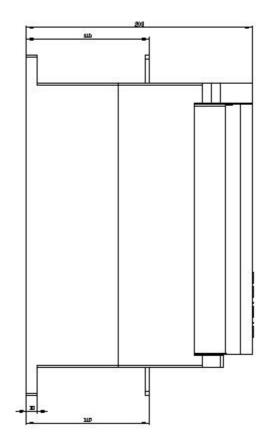



last modified:

3/9/2021 🖸