## SIEMENS

## Data sheet

## 3RW5547-2HA16



SIRIUS soft starter 200-690 V 470 A, 110-250 V AC spring-type terminals

product brand name	SIRIUS			
product category	Hybrid switching devices			
product designation	Soft starter			
product type designation	3RW55			
manufacturer's article number				
<ul> <li>of high feature HMI module usable</li> </ul>	<u>3RW5980-0HF00</u>			
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>			
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	<u>3RW5950-0CH00</u>			
<ul> <li>of communication module PROFIBUS usable</li> </ul>	<u>3RW5980-0CP00</u>			
<ul> <li>of communication module Modbus TCP usable</li> </ul>	<u>3RW5980-0CT00</u>			
<ul> <li>of communication module Modbus RTU usable</li> </ul>	<u>3RW5980-0CR00</u>			
<ul> <li>of communication module Ethernet/IP</li> </ul>	<u>3RW5980-0CE00</u>			
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2450-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10			
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2450-7MN32-0AA0: Type of coordination 1. Iq = 65 kA, CLASS 10			
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10			
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10			
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA			
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA			
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1436-2: Type of coordination 2, Iq = 65 kA</u>			
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE3340-8: Type of coordination 2. Iq = 65 kA</u>			
General technical data				
starting voltage [%]	20 100 %			
stopping voltage [%]	50 50 %			
start-up ramp time of soft starter	0 360 s			
ramp-down time of soft starter	0 360 s			
start torque [%]	10 100 %			
stopping torque [%]	10 100 %			
torque limitation [%]	20 200 %			
current limiting value [%] adjustable	125 800 %			
breakaway voltage [%] adjustable	40 100 %			
breakaway time adjustable	0 2 s			
number of parameter sets	3			

accuracy class acc. to IEC 61557-12	5 %
certificate of suitability	
CE marking	Yes
<ul> <li>UL approval</li> </ul>	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes
<ul> <li>is supported HMI-High Feature</li> </ul>	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
recovery time after overload trip adjustable	60 1 800 s
buffering time in the event of power failure	
<ul> <li>for main current circuit</li> </ul>	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	690 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	8 kV
blocking voltage of the thyristor maximum	1 800 V
service factor	1.15
surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation	
<ul> <li>between main and auxiliary circuit</li> </ul>	690 V; does not apply for thermistor connection
utilization category acc. to IEC 60947-4-2	AC 53a
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
reference code acc. to IEC 81346-2	Q
reference code acc. to IEC 81346-2 Substance Prohibitance (Date)	Q 15.02.2018 00:00:00
Substance Prohibitance (Date)	
Substance Prohibitance (Date) product function	15.02.2018 00:00:00
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse	15.02.2018 00:00:00 Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation	15.02.2018 00:00:00 Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation	15.02.2018 00:00:00 Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET         • manual RESET	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET         • manual RESET         • remote reset	15.02.2018 00:00:00Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET         • remote reset         • communication function	15.02.2018 00:00:00Yes, Full motor protection (thermistor motor protection and electronic motor overload protection)Yes; Type A PTC or Klixon / ThermoclickYes; Only up to 600 V operating voltageYesYesYesYesYesYes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET         • remote reset         • communication function         • operating measured value display	15.02.2018 00:00:00Yes, Full motor protection (thermistor motor protection and electronic motor overload protection)Yes; Type A PTC or Klixon / ThermoclickYes; Only up to 600 V operating voltageYesYesYesYesYesYesYesYesYesYesYes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET         • remote reset         • communication function         • operating measured value display         • event list	15.02.2018 00:00:00         Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET         • remote reset         • communication function         • operating measured value display         • event list         • error logbook	15.02.2018 00:00:00         Yes         Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)         Yes; Type A PTC or Klixon / Thermoclick         Yes; Only up to 600 V operating voltage         Yes         Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • notor overload protection         • auto-RESET         • remote reset         • communication function         • operating measured value display         • event list         • error logbook         • via software parameterizable	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • evaluation of thermistor motor protection         • inside-delta circuit         • auto-RESET         • remote reset         • communication function         • operating measured value display         • event list         • error logbook         • via software parameterizable         • via software configurable	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date)         product function         • ramp-up (soft starting)         • ramp-down (soft stop)         • breakaway pulse         • adjustable current limitation         • creep speed in both directions of rotation         • pump ramp down         • DC braking         • motor heating         • slave pointer function         • trace function         • intrinsic device protection         • motor overload protection         • notor overload protection         • auto-RESET         • manual RESET         • remote reset         • communication function         • operating measured value display         • event list         • error logbook         • via software parameterizable         • via software configurable	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes

programmable control inputs/outputs     condition monitoring					
analog output	Yes; 4 20 mA (default) / 0 10 V Yes				
condition monitoring	Yes				
<ul> <li>automatic parameterisation</li> </ul>	Yes				
application wizards	Yes				
<ul> <li>alternative run-down</li> </ul>	Yes				
<ul> <li>emergency operation mode</li> </ul>	Yes				
reversing operation	Yes				
<ul> <li>soft starting at heavy starting conditions</li> </ul>	Yes				
Power Electronics					
operational current					
<ul> <li>at 40 °C rated value</li> </ul>	470 A				
<ul> <li>at 40 °C rated value minimum</li> </ul>	94 A				
<ul> <li>at 50 °C rated value</li> </ul>	416 A				
at 60 °C rated value	380 A				
operational current at inside-delta circuit					
at 40 °C rated value	814 A				
at 50 °C rated value	721 A				
at 60 °C rated value	658 A				
operating voltage					
• rated value	200 690 V				
at inside-delta circuit rated value	200 600 V				
relative negative tolerance of the operating voltage	-15 %				
relative positive tolerance of the operating voltage	10 %				
relative negative tolerance of the operating voltage at	-15 %				
inside-delta circuit					
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit	10 %				
relative positive tolerance of the operating voltage at	10 %				
relative positive tolerance of the operating voltage at inside-delta circuit	10 % 132 kW				
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors					
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value	132 kW				
relative positive tolerance of the operating voltage at inside-delta circuitoperating power for 3-phase motors• at 230 V at 40 °C rated value• at 230 V at inside-delta circuit at 40 °C rated value	132 kW 250 kW				
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value	132 kW 250 kW 250 kW				
relative positive tolerance of the operating voltage at inside-delta circuitoperating power for 3-phase motors• at 230 V at 40 °C rated value• at 230 V at inside-delta circuit at 40 °C rated value• at 400 V at 40 °C rated value• at 400 V at inside-delta circuit at 40 °C rated value• at 400 V at inside-delta circuit at 40 °C rated value	132 kW 250 kW 250 kW 400 kW				
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 500 V at 40 °C rated value	132 kW 250 kW 250 kW 400 kW 315 kW				
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at inside-delta circuit at 40 °C rated value	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW				
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 500 V at inside-delta circuit at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at inside-delta circuit at 40 °C rated value • at 690 V at 40 °C rated value	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW				
relative positive tolerance of the operating voltage at inside-delta circuitoperating power for 3-phase motors• at 230 V at 40 °C rated value• at 230 V at inside-delta circuit at 40 °C rated value• at 400 V at 40 °C rated value• at 400 V at inside-delta circuit at 40 °C rated value• at 500 V at 40 °C rated value• at 500 V at 40 °C rated value• at 500 V at 40 °C rated value• at 690 V at 40 °C rated value• at 690 V at 40 °C rated value	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 20 °C rated value         • at 690 V at 20 °C rated value	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 %				
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 690 V at 40 °C rated value	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 %				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at with the context of the operating the context of the c	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 %				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 50 Hz 60 Hz -10 % 10 %; Relative to set le				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at 40 °C rated value         • at 230 V at 40 °C rated value         • at 200 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 50 Hz 60 Hz -10 % 10 %; Relative to set le				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup         • at 60 °C after startup         • at 40 °C during startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 % Relative to set le 141 W 125 W 114 W				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 400 V at o °C rated value         • at 400 V at 40 °C rated value         • at 400 V at o °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup         • at 60 °C after startup         • at 60 °C after startup         • at 40 °C during startup         • at 40 °C during startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 % Relative to set le 141 W 125 W 114 W				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup         • at 40 °C after startup         • at 40 °C after startup         • at 40 °C during startup         • at 40 °C during startup         • at 40 °C during startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le 141 W 125 W 114 W 7 651 W 6 400 W 5 620 W				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup         • at 40 °C after startup         • at 40 °C during startup         • at 40 °C during startup         • at 60 °C during startup         • at 60 °C during startup         • at 60 °C during startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le 141 W 125 W 114 W 7 651 W 6 400 W				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 400 V at inside-delta circuit at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup         • at 40 °C during startup         • at 40 °C during startup         • at 60 °C during startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le 141 W 125 W 114 W 7 651 W 6 400 W 5 620 W Electronic, tripping in the event of thermal overload of the motor				
relative positive tolerance of the operating voltage at inside-delta circuit         operating power for 3-phase motors         • at 230 V at 40 °C rated value         • at 230 V at 40 °C rated value         • at 230 V at inside-delta circuit at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 400 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 500 V at 40 °C rated value         • at 690 V at 40 °C rated value         • at 690 V at 40 °C rated value         Operating frequency 1 rated value         Operating frequency 2 rated value         relative negative tolerance of the operating frequency         relative positive tolerance of the operating frequency         minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 60 °C after startup         • at 40 °C after startup         • at 40 °C during startup         • at 40 °C during startup         • at 60 °C during startup         • at 60 °C during startup         • at 60 °C during startup	132 kW 250 kW 250 kW 400 kW 315 kW 500 kW 400 kW 50 Hz 60 Hz -10 % 10 % 10 % 10 %; Relative to set le 141 W 125 W 114 W 7 651 W 6 400 W 5 620 W				

• at 50 Hz	110 250 V			
• at 60 Hz	110 250 V			
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %			
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %			
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %			
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %			
control supply voltage frequency	50 60 Hz			
relative negative tolerance of the control supply voltage frequency	-10 %			
relative positive tolerance of the control supply voltage frequency	10 %			
control supply current in standby mode rated value	100 mA			
holding current in bypass operation rated value	150 mA			
locked-rotor current at close of bypass contact maximum	0.87 A			
inrush current peak at application of control supply voltage maximum	43 A			
duration of inrush current peak at application of control supply voltage	1.6 ms			
design of the overvoltage protection	Varistor			
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply			
Inputs/ Outputs				
number of digital inputs	4			
parameterizable	4			
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick			
<ul> <li>number of digital outputs</li> </ul>	4			
<ul> <li>number of digital outputs parameterizable</li> </ul>	3			
<ul> <li>number of digital outputs not parameterizable</li> </ul>	1			
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)			
number of analog outputs	1			
switching capacity current of the relay outputs				
• at AC-15 at 250 V rated value	3 A			
• at DC-13 at 24 V rated value	1 A			
Installation/ mounting/ dimensions				
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)			
fastening method	screw fixing			
height	393 mm 210 mm			
depth	203 mm			
required spacing with side-by-side mounting	203 mm			
forwards	10 mm			
backwards	0 mm			
• upwards	100 mm			
downwards	75 mm			
• at the side	5 mm			
weight without packaging	10.9 kg			
Connections/ Terminals				
type of electrical connection				
<ul> <li>for main current circuit</li> </ul>	busbar connection			
for control circuit	spring-loaded terminals			
width of connection bar maximum	45 mm			
wire length for thermistor connection				
• with conductor cross-section = 0.5 mm <sup>2</sup> maximum	50 m			
<ul> <li>with conductor cross-section = 1.5 mm<sup>2</sup> maximum</li> </ul>	150 m			

• with conductor cross-section = 2.5 mm² maximum       250 m         type of connectable conductor cross-sections       5 for DIN cable lug for main contacts stranded         • for DIN cable lug for main contacts finely stranded       2x (50 240 mm²)         type of connectable conductor cross-sections       2x (70 240 mm²)         type of connectable conductor cross-sections       2x (0.25 1.5 mm²)         • for control circuit solid       2x (0.25 1.5 mm²)         • for control circuit finely stranded with core end processing       2x (24 16)         • at AWG cables for control circuit finely stranded with core end processing       2x (24 16)         wire length       2x (24 16)				
<ul> <li>for DIN cable lug for main contacts stranded</li> <li>for DIN cable lug for main contacts finely stranded</li> <li>for DIN cable lug for main contacts finely stranded</li> <li>2x (50 240 mm<sup>2</sup>)</li> <li>2x (70 240 mm<sup>2</sup>)</li> <li>2x (0.25 1.5 mm<sup>2</sup>)</li> <li>for control circuit solid</li> <li>for control circuit finely stranded with core end processing</li> <li>at AWG cables for control circuit solid</li> <li>at AWG cables for control circuit finely stranded with core end processing</li> <li>wire length</li> </ul>				
• for DIN cable lug for main contacts finely stranded2x (70 240 mm²)type of connectable conductor cross-sections • for control circuit solid2x (0.25 1.5 mm²)• for control circuit finely stranded with core end processing2x (0.25 1.5 mm²)• at AWG cables for control circuit solid2x (24 16)• at AWG cables for control circuit finely stranded with core end processing2x (24 16)wire lengthImage: stranded with core end processing				
type of connectable conductor cross-sections $2x (0.25 \dots 1.5 \text{ mm}^2)$ • for control circuit solid $2x (0.25 \dots 1.5 \text{ mm}^2)$ • for control circuit finely stranded with core end processing $2x (0.25 \dots 1.5 \text{ mm}^2)$ • at AWG cables for control circuit solid $2x (24 \dots 16)$ • at AWG cables for control circuit finely stranded with core end processing $2x (24 \dots 16)$ wire length $2x (24 \dots 16)$				
<ul> <li>for control circuit solid</li> <li>for control circuit finely stranded with core end processing</li> <li>at AWG cables for control circuit solid</li> <li>at AWG cables for control circuit finely stranded with core end processing</li> <li>wire length</li> <li>2x (0.25 1.5 mm<sup>2</sup>)</li> <li>2x (24 16)</li> <li>2x (24 16)</li> </ul>				
<ul> <li>for control circuit finely stranded with core end processing</li> <li>at AWG cables for control circuit solid</li> <li>at AWG cables for control circuit finely stranded with core end processing</li> <li>wire length</li> <li>2x (0.25 1.5 mm<sup>2</sup>)</li> <li>2x (24 16)</li> <li>2x (24 16)</li> </ul>				
processing     2x (24 16)       • at AWG cables for control circuit solid     2x (24 16)       • at AWG cables for control circuit finely stranded with core end processing     2x (24 16)       wire length     2x (24 16)				
• at AWG cables for control circuit finely stranded with core end processing wire length 2x (24 16)				
• at AWG cables for control circuit finely stranded with core end processing wire length 2x (24 16)				
core end processing wire length				
between soft starter and motor maximum     800 m				
• at the digital inputs at DC maximum 1 000 m	1 000 m			
tightening torque				
• for main contacts with screw-type terminals 14 24 N·m				
• for auxiliary and control contacts with screw-type 0.8 1.2 N·m	0.8 1.2 N·m			
terminals				
tightening torque [lbf·in]				
• for main contacts with screw-type terminals 124 210 lbf·in				
• for auxiliary and control contacts with screw-type 7 10.3 lbf·in				
terminals				
Ambient conditions				
installation altitude at height above sea level maximum 2 000 m; Derating as of 1000 m, see catalog				
ambient temperature				
• during operation -25 +60 °C; Please observe derating at temperatures of 40 °C above	C or			
• during storage and transport -40 +80 °C				
environmental category				
• during operation acc. to IEC 60721 3K6 (no ice formation, only occasional condensation), 3C3 (no s mist), 3S2 (sand must not get into the devices), 3M6	salt			
• during storage acc. to IEC 60721 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (san to get inside the devices), 1M4	ind must			
• during transport acc. to IEC 60721 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)				
EMC emitted interference acc. to IEC 60947-4-2: Class A				
Communication/ Protocol				
communication module is supported				
PROFINET standard     Yes				
PROFINET high-feature     Yes				
• EtherNet/IP Yes				
Modbus RTU     Yes				
Modbus TCP     Yes				
PROFIBUS     Yes				
UL/CSA ratings				
manufacturer's article number				
• of the fuse				
- usable for Standard Faults up to 575/600 V     according to UL     Type: Class J / L, max. 1600 A; Iq = 30 kA				
— usable for High Faults up to 575/600 V Type: Class J / L, max. 1200 A; Iq = 100 kA				
according to UL — usable for Standard Faults at inside-delta according to UL Type: Class J / L, max. 1600 A; Iq = 30 kA				
circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL Type: Class J / L, max. 1200 A; Iq = 100 kA				
to 575/600 V according to UL				
operating power [hp] for 3-phase motors				
• at 200/208 V at 50 °C rated value 150 hp				
• at 220/230 V at 50 °C rated value 150 hp				
• at 460/480 V at 50 °C rated value 350 hp				
• at 575/600 V at 50 °C rated value 450 hp				
at 200/208 V at inside-delta circuit at 50 °C rated 250 hp value				

<ul> <li>at 220/230 V at value</li> </ul>	inside-delta circuit at 5	50 °C rated	250 h	250 hp			
● at 460/480 V at value	inside-delta circuit at 5	50 °C rated	600 h	600 hp			
<ul> <li>at 575/600 V at inside-delta circuit at 50 °C rated value</li> </ul>			800 h	р			
contact rating of aux	ciliary contacts accor	ding to UL	R300	-B300			
Safety related data	-	-					
protection class IP on the front acc. to IEC 60529			IP00; IP20 with cover				
touch protection on the front acc. to IEC 60529			finger-safe, for vertical contact from the front with cover				
electromagnetic con			-	o IEC 60947-4-2			
ATEX							
certificate of suitabil	lity						
<ul> <li>ATEX</li> </ul>			Yes				
• IECEx			Yes				
<ul> <li>according to AT</li> </ul>	EX directive 2014/34/E	EU	BVS	BVS 18 ATEX F 003 X			
type of protection according to ATEX directive 2014/34/EU			II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]				
hardware fault tolerance acc. to IEC 61508 relating to ATEX		0					
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX		0.008	}				
PFHD with high demand rate acc. to EN 62061 relating to ATEX		0.0000005 1/h					
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX		SIL1					
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX		3 у					
Certificates/ approvals	s						
General Product Ap	proval				EMC	For use in hazard- ous locations	
(SP) Can		(Ų) u		EHC	RCM	KEx ATEX	
For use in hazard-	Declaration of	Test Ossilis	- 4	Marine / Okianing			
ous locations	Conformity	Test Certifica	ates	Marine / Shipping			
IECEX	CE EG-Konf.	<u>Type Test Cer</u> ates/Test Re		ABS	BUREAU VERITAS	Lloyd's Register uis	

other

**Confirmation** 

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5547-2HA16

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5547-2HA16

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5547-2HA16

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5547-2HA16&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5547-2HA16/char

Characteristic: Installation altitude

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5547-2HA16&objecttype=14&gridview=view1 Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

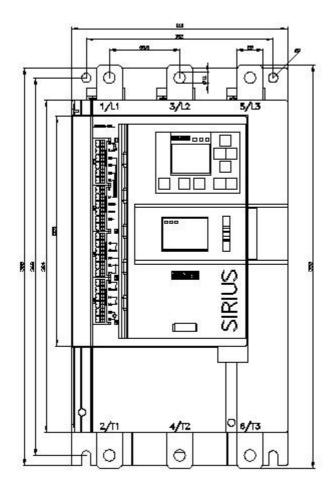

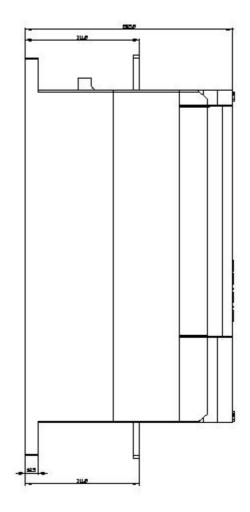



last modified:

3/9/2021 🖸