## **SIEMENS**

Data sheet 3RW5552-6HA14



SIRIUS soft starter 200-480 V 630 A, 110-250 V AC Screw terminals

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	3RW5950-0CH00
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NB3350-1KK26; Type of coordination 2, Iq = 65 kA
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NC3343-1U; Type of coordination 2, Iq = 65 kA
General technical data	

General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 50 %
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class acc. to IEC 61557-12	5 %

certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
recovery time after overload trip adjustable	60 1 800 s
buffering time in the event of power failure	
• for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
	3, acc. to IEC 60947-4-2 6 kV
impulse voltage rated value	
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	400.14
between main and auxiliary circuit	480 V; does not apply for thermistor connection
utilization category acc. to IEC 60947-4-2	AC 53a
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
reference code acc. to IEC 81346-2	_ Q
Substance Prohibitance (Date)	11.02.2019 00:00:00
product function	V
ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
<ul> <li>breakaway pulse</li> </ul>	Yes
<ul><li>breakaway pulse</li><li>adjustable current limitation</li></ul>	Yes Yes
<ul><li>breakaway pulse</li><li>adjustable current limitation</li><li>creep speed in both directions of rotation</li></ul>	Yes Yes Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> </ul>	Yes Yes Yes Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> </ul>	Yes Yes Yes Yes Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> </ul>	Yes Yes Yes Yes Yes Yes Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> </ul>	Yes Yes Yes Yes Yes Yes Yes Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> </ul> • evaluation of thermistor motor protection <ul> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> </ul> • evaluation of thermistor motor protection <ul> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> <li>via software parameterizable</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> <li>via software parameterizable</li> <li>via software configurable</li> </ul>	Yes
<ul> <li>breakaway pulse</li> <li>adjustable current limitation</li> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>slave pointer function</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> </ul> • evaluation of thermistor motor protection <ul> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> <li>remote reset</li> <li>communication function</li> <li>operating measured value display</li> <li>event list</li> <li>error logbook</li> <li>via software parameterizable</li> </ul>	Yes

<ul> <li>PROFlenergy</li> </ul>	Yes; in connection with the PROFINET Standard and PROFINET High-
	Feature communication modules
firmware update	Yes
<ul> <li>removable terminal for control circuit</li> </ul>	Yes
<ul> <li>voltage ramp</li> </ul>	Yes
torque control	Yes
<ul> <li>combined braking</li> </ul>	Yes
<ul><li>analog output</li></ul>	Yes; 4 20 mA (default) / 0 10 V
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes
<ul> <li>condition monitoring</li> </ul>	Yes
<ul> <li>automatic parameterisation</li> </ul>	Yes
<ul> <li>application wizards</li> </ul>	Yes
<ul> <li>alternative run-down</li> </ul>	Yes
<ul> <li>emergency operation mode</li> </ul>	Yes
<ul> <li>reversing operation</li> </ul>	Yes
soft starting at heavy starting conditions	Yes
Power Electronics	
operational current	
<ul> <li>at 40 °C rated value</li> </ul>	630 A
<ul> <li>at 40 °C rated value minimum</li> </ul>	126 A
<ul> <li>at 50 °C rated value</li> </ul>	561 A
at 60 °C rated value	510 A
operational current at inside-delta circuit	
<ul> <li>at 40 °C rated value</li> </ul>	1 091 A
<ul> <li>at 50 °C rated value</li> </ul>	972 A
at 60 °C rated value	883 A
operating voltage	
rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at	-15 %
inside-delta circuit	
	10 %
inside-delta circuit relative positive tolerance of the operating voltage at	10 %
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit	10 % 200 kW
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors	
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors  • at 230 V at 40 °C rated value	200 kW
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value	200 kW 355 kW
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value	200 kW 355 kW 355 kW
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value	200 kW 355 kW 355 kW 630 kW 50 Hz
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 %
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency  relative positive tolerance of the operating frequency	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 %
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency  relative positive tolerance of the operating frequency  minimum load [%]	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 %
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency  relative positive tolerance of the operating frequency  minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  • at 40 °C during startup  • at 60 °C during startup	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W  9 538 W 8 115 W 7 123 W Electronic, tripping in the event of thermal overload of the motor
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  • at 60 °C after startup  o at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage control supply voltage at AC	200 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le  189 W 135 W 108 W  9 538 W 8 115 W 7 123 W Electronic, tripping in the event of thermal overload of the motor
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  • at 60 °C after startup  o at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage	200 kW 355 kW 355 kW 630 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  189 W 135 W 108 W  9 538 W 8 115 W 7 123 W Electronic, tripping in the event of thermal overload of the motor

relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	100 mA
holding current in bypass operation rated value	210 mA
locked-rotor current at close of bypass contact maximum	1 A
inrush current peak at application of control supply voltage maximum	44 A
duration of inrush current peak at application of control supply voltage	1.7 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
parameterizable	4
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick
number of digital outputs	4
<ul> <li>number of digital outputs parameterizable</li> </ul>	3
number of digital outputs not parameterizable	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A
<ul> <li>at DC-13 at 24 V rated value</li> </ul>	1 A
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	764 mm
width	478 mm
depth	241 mm
required spacing with side-by-side mounting	
• forwards	10 mm
<ul><li>backwards</li></ul>	0 mm
• upwards	100 mm
<ul><li>downwards</li></ul>	75 mm
at the side	5 mm
weight without packaging	45 kg
Connections/ Terminals	
type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	busbar connection
for control circuit	screw-type terminals
width of connection bar maximum	55 mm
wire length for thermistor connection	
• with conductor cross-section = 0.5 mm² maximum	50 m
• with conductor cross-section = 1.5 mm² maximum	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	

<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	2x (50 240 mm²)
for DIN cable lug for main contacts finely stranded	2x (70 240 mm²)
type of connectable conductor cross-sections	
<ul> <li>for control circuit solid</li> </ul>	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
<ul> <li>for control circuit finely stranded with core end</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
processing	4 (00 40) 0 (00 44)
at AWG cables for control circuit solid	1x (20 12), 2x (20 14)
wire length	
between soft starter and motor maximum	800 m
at the digital inputs at DC maximum	1 000 m
tightening torque	
for main contacts with screw-type terminals	20 35 N·m
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	177 310 lbf·in
for auxiliary and control contacts with screw-type	7 10.3 lbf·in
terminals	7 10.3 lbl iii
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	- J
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or
	above
during storage and transport	-40 +80 °C
environmental category	
<ul> <li>during operation acc. to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt
1	mist), 3S2 (sand must not get into the devices), 3M6
<ul> <li>during storage acc. to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul> <li>during transport acc. to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
	4001 to 120 000 11 1 21 01400 11
Communication/ Protocol	
Communication/ Protocol	
communication module is supported	Yes
communication module is supported  • PROFINET standard	Yes Yes
communication module is supported  PROFINET standard PROFINET high-feature	Yes
communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP	Yes Yes
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU	Yes Yes Yes
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP	Yes Yes Yes Yes
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS	Yes Yes Yes
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings	Yes Yes Yes Yes
communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS  UL/CSA ratings  manufacturer's article number	Yes Yes Yes Yes
communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS  UL/CSA ratings  manufacturer's article number  • of the fuse	Yes Yes Yes Yes Yes Yes
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL	Yes Yes Yes Yes Yes Yes Yes Type: Class J / L, max. 2000 A; Iq = 42 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V	Yes Yes Yes Yes Yes Yes Yes Type: Class J / L, max. 2000 A; Iq = 42 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA  Type: Class J / L, max. 2000 A; lq = 42 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA  Type: Class J / L, max. 2000 A; lq = 42 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse  usable for Standard Faults up to 575/600 V according to UL  usable for High Faults up to 575/600 V according to UL  usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL  usable for High Faults at inside-delta circuit up to 575/600 V according to UL  operating power [hp] for 3-phase motors	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; Iq = 42 kA  Type: Class J / L, max. 2000 A; Iq = 100 kA  Type: Class J / L, max. 2000 A; Iq = 42 kA  Type: Class J / L, max. 2000 A; Iq = 100 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL  operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 40 kA  Type: Class J / L, max. 2000 A; lq = 100 kA
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL  operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA  200 hp 200 hp
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL  operating power [hp] for 3-phase motors at 200/208 V at 50 °C rated value at 460/480 V at 50 °C rated value at 200/208 V at inside-delta circuit at 50 °C rated	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA  Type: Class J / L, max. 2000 A; lq = 42 kA  Type: Class J / L, max. 2000 A; lq = 100 kA  200 hp 200 hp 450 hp
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number  of the fuse  usable for Standard Faults up to 575/600 V according to UL  usable for High Faults up to 575/600 V according to UL  usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL  usable for High Faults at inside-delta circuit up to 575/600 V according to UL  operating power [hp] for 3-phase motors  at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 200/208 V at 50 °C rated value at 220/230 V at inside-delta circuit at 50 °C rated value at 220/230 V at inside-delta circuit at 50 °C rated value at 220/230 V at inside-delta circuit at 50 °C rated value at 2460/480 V at inside-delta circuit at 50 °C rated value at 460/480 V at inside-delta circuit at 50 °C rated value	Yes Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; Iq = 42 kA  Type: Class J / L, max. 2000 A; Iq = 100 kA  Type: Class J / L, max. 2000 A; Iq = 42 kA  Type: Class J / L, max. 2000 A; Iq = 100 kA  200 hp 200 hp 450 hp 350 hp
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of the fuse — usable for Standard Faults up to 575/600 V according to UL — usable for High Faults up to 575/600 V according to UL — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL — usable for High Faults at inside-delta circuit up to 575/600 V according to UL  Operating power [hp] for 3-phase motors  at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 200/208 V at inside-delta circuit at 50 °C rated value at 220/230 V at inside-delta circuit at 50 °C rated value at 220/230 V at inside-delta circuit at 50 °C rated value	Yes Yes Yes Yes Yes Yes  Type: Class J / L, max. 2000 A; Iq = 42 kA  Type: Class J / L, max. 2000 A; Iq = 100 kA  Type: Class J / L, max. 2000 A; Iq = 42 kA  Type: Class J / L, max. 2000 A; Iq = 100 kA  200 hp 200 hp 450 hp 350 hp 400 hp

Safety related data	
protection class IP on the front acc. to IEC 60529	IP00
electromagnetic compatibility	acc. to IEC 60947-4-2
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance acc. to IEC 61508 relating to ATEX	0
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.0000005 1/h
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y
Cortificatos/approvals	

Certificates/ approvals

**General Product Approval** 

**EMC** 

For use in hazardous locations













IECEx

For use in hazardous locations Declaration of Conformity

**Test Certificates** 

Marine / Shipping

other





Type Test Certificates/Test Report





Confirmation

## Further informatior

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5552-6HA14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5552-6HA14

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RW5552-6HA14

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5552-6HA14&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5552-6HA14/char


Characteristic: Installation altitude


 $\underline{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5552-6HA14\&objecttype=14\&gridview=view1.pdf}$ 

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

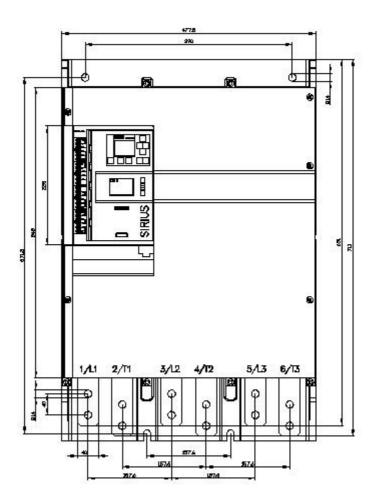

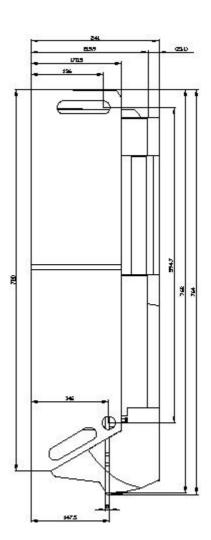

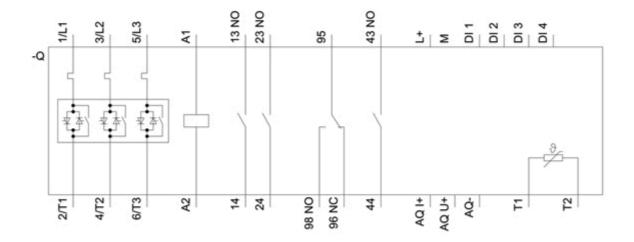

last modified: 3/9/2021 🖸