## SIEMENS

## Data sheet

## 3RW5554-2HA14



SIRIUS soft starter 200-480 V 840 A, 110-250 V AC Spring-type terminals

Figure similar

product brand name	SIRIUS		
product category	Hybrid switching devices		
product designation	Soft starter		
product type designation	3RW55		
manufacturer's article number			
<ul> <li>of high feature HMI module usable</li> </ul>	<u>3RW5980-0HF00</u>		
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>		
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	<u>3RW5950-0CH00</u>		
<ul> <li>of communication module PROFIBUS usable</li> </ul>	<u>3RW5980-0CP00</u>		
<ul> <li>of communication module Modbus TCP usable</li> </ul>	<u>3RW5980-0CT00</u>		
<ul> <li>of communication module Modbus RTU usable</li> </ul>	<u>3RW5980-0CR00</u>		
<ul> <li>of communication module Ethernet/IP</li> </ul>	<u>3RW5980-0CE00</u>		
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10		
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10		
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	<u>3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</u>		
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	<u>3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</u>		
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA		
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NB3351-1KK26; Type of coordination 2, Iq = 65 kA</u>		
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NC3343-1U; Type of coordination 2, Iq = 65 kA</u>		
General technical data			
starting voltage [%]	20 100 %		
stopping voltage [%]	50 50 %		
start-up ramp time of soft starter	0 360 s		
ramp-down time of soft starter	0 360 s		
start torque [%]	10 100 %		
stopping torque [%]	10 100 %		
torque limitation [%]	20 200 %		
current limiting value [%] adjustable	125 800 %		
breakaway voltage [%] adjustable	40 100 %		
breakaway time adjustable	0 2 s		
number of parameter sets	3		
accuracy class acc. to IEC 61557-12	5 %		

certificate of suitability	Ver
• CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
• HMI-High Feature	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
recovery time after overload trip adjustable	60 1 800 s
buffering time in the event of power failure	400
• for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
between main and auxiliary circuit	480 V; does not apply for thermistor connection
utilization category acc. to IEC 60947-4-2	AC 53a
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	11.02.2019 00:00:00
<pre>product function • ramp-up (soft starting)</pre>	Yes
<ul> <li>ramp-up (soft starting)</li> <li>ramp-down (soft stop)</li> </ul>	Yes
breakaway pulse	Yes
adjustable current limitation	Yes
<ul> <li>creep speed in both directions of rotation</li> </ul>	Yes
<ul> <li>pump ramp down</li> </ul>	Yes
DC braking	Yes
motor heating	Yes
slave pointer function	Yes
trace function	Yes
intrinsic device protection	Yes
<ul> <li>motor overload protection</li> </ul>	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick
inside-delta circuit	Yes
auto-RESET	Yes
manual RESET	Yes
remote reset	Yes
<ul> <li>communication function</li> </ul>	Yes
<ul> <li>operating measured value display</li> </ul>	Yes
event list	Yes
error logbook	Yes
via software parameterizable	Yes
• via software configurable	Yes
screw terminal	No
<ul> <li>spring-type terminal</li> </ul>	Yes

PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-			
• Ficorienergy	Feature communication modules			
<ul> <li>firmware update</li> </ul>	Yes			
<ul> <li>removable terminal for control circuit</li> </ul>	Yes			
<ul> <li>voltage ramp</li> </ul>	Yes			
torque control	Yes			
<ul> <li>combined braking</li> </ul>	Yes			
<ul> <li>analog output</li> </ul>	Yes; 4 20 mA (default) / 0 10 V			
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes			
<ul> <li>condition monitoring</li> </ul>	Yes			
<ul> <li>automatic parameterisation</li> </ul>	Yes			
<ul> <li>application wizards</li> </ul>	Yes			
<ul> <li>alternative run-down</li> </ul>	Yes			
<ul> <li>emergency operation mode</li> </ul>	Yes			
<ul> <li>reversing operation</li> </ul>	Yes			
<ul> <li>soft starting at heavy starting conditions</li> </ul>	Yes			
Power Electronics				
operational current				
• at 40 °C rated value	840 A			
<ul> <li>at 40 °C rated value minimum</li> </ul>	168 A			
• at 50 °C rated value	748 A			
• at 60 °C rated value	670 A			
operational current at inside-delta circuit				
<ul> <li>at 40 °C rated value</li> </ul>	1 454 A			
<ul> <li>at 50 °C rated value</li> </ul>	1 295 A			
• at 60 °C rated value	1 160 A			
operating voltage				
<ul> <li>rated value</li> </ul>	200 480 V			
at inside-delta circuit rated value	200 480 V			
relative negative tolerance of the operating voltage	-15 %			
relative positive tolerance of the operating voltage	10 %			
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %			
relative positive tolerance of the operating voltage at inside-delta circuit	10 %			
operating power for 3-phase motors				
<ul> <li>at 230 V at 40 °C rated value</li> </ul>	250 kW			
<ul> <li>at 230 V at inside-delta circuit at 40 °C rated value</li> </ul>	450 kW			
<ul> <li>at 400 V at 40 °C rated value</li> </ul>	450 kW			
<ul> <li>at 400 V at inside-delta circuit at 40 °C rated value</li> </ul>	800 kW			
Operating frequency 1 rated value	50 Hz			
Operating frequency 2 rated value	60 Hz			
relative negative tolerance of the operating frequency	-10 %			
relative positive tolerance of the operating frequency	10 %			
minimum load [%]	10 %; Relative to set le			
minimum load [%] power loss [W] for rated value of the current at AC	10 %; Relative to set le			
minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup	10 %; Relative to set le 252 W			
minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup	10 %; Relative to set le 252 W 205 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup	10 %; Relative to set le 252 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         power loss [W] at AC at current limitation 350 %	10 %; Relative to set le 252 W 205 W 164 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         • at 60 °C after startup         • at 40 °C during startup	10 %; Relative to set le 252 W 205 W 164 W 14 441 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup	10 %; Relative to set le 252 W 205 W 164 W 14 441 W 12 187 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         • at 60 °C during startup	10 %; Relative to set le 252 W 205 W 164 W 14 441 W 12 187 W 10 405 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         • at 60 °C after startup         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         • at 60 °C during startup         • at 60 °C during startup	10 %; Relative to set le 252 W 205 W 164 W 14 441 W 12 187 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         • at 40 °C during startup         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup	10 %; Relative to set le 252 W 205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup	10 %; Relative to set le 252 W 205 W 164 W 14 441 W 12 187 W 10 405 W			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         • at 40 °C during startup         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup         type of the motor protection         Control circuit/ Control         type of voltage of the control supply voltage         control supply voltage at AC	10 %; Relative to set le 252 W 205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor			
minimum load [%]         power loss [W] for rated value of the current at AC         • at 40 °C after startup         • at 50 °C after startup         • at 60 °C after startup         power loss [W] at AC at current limitation 350 %         • at 40 °C during startup         • at 50 °C during startup         • at 60 °C during startup	10 %; Relative to set le 252 W 205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor			

relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %		
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %		
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %		
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %		
control supply voltage frequency	50 60 Hz		
relative negative tolerance of the control supply voltage frequency	-10 %		
relative positive tolerance of the control supply voltage frequency	10 %		
control supply current in standby mode rated value	100 mA		
holding current in bypass operation rated value	210 mA		
locked-rotor current at close of bypass contact maximum	1 A		
inrush current peak at application of control supply voltage maximum	44 A		
duration of inrush current peak at application of control supply voltage	1.7 ms		
design of the overvoltage protection	Varistor		
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply		
Inputs/ Outputs			
number of digital inputs	4		
• parameterizable	4		
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick		
<ul> <li>number of digital outputs</li> </ul>	4		
<ul> <li>number of digital outputs parameterizable</li> </ul>	3		
<ul> <li>number of digital outputs not parameterizable</li> </ul>	1		
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)		
number of analog outputs	1		
switching capacity current of the relay outputs			
• at AC-15 at 250 V rated value	3 A		
<ul> <li>at DC-13 at 24 V rated value</li> </ul>	1 A		
Installation/ mounting/ dimensions			
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)		
fastening method	screw fixing		
height	764 mm		
width	478 mm		
depth	241 mm		
required spacing with side-by-side mounting			
• forwards	10 mm		
backwards	0 mm		
• upwards	100 mm		
downwards	75 mm		
• at the side	5 mm		
weight without packaging	45 kg		
Connections/ Terminals			
type of electrical connection			
<ul> <li>for main current circuit</li> </ul>	busbar connection		
for control circuit	spring-loaded terminals		
width of connection bar maximum	55 mm		
wire length for thermistor connection			
<ul> <li>with conductor cross-section = 0.5 mm<sup>2</sup> maximum</li> </ul>	50 m		
<ul> <li>with conductor cross-section = 1.5 mm<sup>2</sup> maximum</li> </ul>	150 m		
<ul> <li>with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>	250 m		
type of connectable conductor cross-sections			


<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	2x (50 240 mm²)		
<ul> <li>for DIN cable lug for main contacts finely stranded</li> </ul>	2x (70 240 mm²)		
type of connectable conductor cross-sections			
<ul> <li>for control circuit solid</li> </ul>	2x (0.25 1.5 mm²)		
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	2x (0.25 1.5 mm²)		
<ul> <li>at AWG cables for control circuit solid</li> </ul>	2x (24 16)		
<ul> <li>at AWG cables for control circuit finely stranded with core end processing</li> </ul>	2x (24 16)		
wire length			
<ul> <li>between soft starter and motor maximum</li> </ul>	800 m		
<ul> <li>at the digital inputs at DC maximum</li> </ul>	1 000 m		
tightening torque			
<ul> <li>for main contacts with screw-type terminals</li> </ul>	20 35 N·m		
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m		
tightening torque [lbf·in]			
<ul> <li>for main contacts with screw-type terminals</li> </ul>	177 310 lbf·in		
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	7 10.3 lbf·in		
terminals			
Ambient conditions			
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog		
ambient temperature			
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above		
<ul> <li>during storage and transport</li> </ul>	-40 +80 °C		
environmental category			
• during operation acc. to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
• during storage acc. to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4		
during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)		
EMC emitted interference	acc. to IEC 60947-4-2: Class A		
Communication/ Protocol			
communication module is supported			
PROFINET standard	Yes		
PROFINET high-feature	Yes		
EtherNet/IP	Yes		
Modbus RTU	Yes		
Modbus TCP	Yes		
PROFIBUS	Yes		
UL/CSA ratings			
manufacturer's article number			
• of the fuse			
- usable for Standard Faults up to 575/600 V	Type: Class J / L, max. 2500 A; Iq = 42 kA		
according to UL — usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 2500 A; Iq = 100 kA		
<ul> <li>usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 2500 A; Iq = 42 kA		
	Type: Class J / L, max. 2500 A; Iq = 100 kA		
operating power [hp] for 3-phase motors			
• at 200/208 V at 50 °C rated value	250 hp		
• at 220/230 V at 50 °C rated value	300 hp		
• at 460/480 V at 50 °C rated value	600 hp		
<ul> <li>at 200/208 V at inside-delta circuit at 50 °C rated value</li> </ul>	450 hp		
<ul> <li>at 220/230 V at inside-delta circuit at 50 °C rated value</li> </ul>	550 hp		


value							
	xiliary contacts accor	dina to UL	 R300-B	300			
Safety related data							
protection class IP on the front acc. to IEC 60529			IP00				
electromagnetic cor	npatibility		acc. to	IEC 60947-4-2			
ATEX							
certificate of suitabi	lity						
• ATEX			Yes				
<ul> <li>IECEx</li> </ul>			Yes				
<ul> <li>according to AT</li> </ul>	TEX directive 2014/34/E	EU	BVS 18	3 ATEX F 003 X			
type of protection a 2014/34/EU	ccording to ATEX dire	ective		[Ex eb Gb] [Ex db Gb Ex db Mb]	o] [Ex pxb Gb], II (2)D	[Ex tb Db] [Ex pxb Db],	
hardware fault tolerance acc. to IEC 61508 relating to ATEX		0					
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX		0.008					
PFHD with high den to ATEX	nand rate acc. to EN 6	2061 relating	0.00000	005 1/h			
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX		SIL1					
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX		3 у	3 у				
Certificates/ approval	S						
General Product Ap	proval				EMC	For use in hazard-	
Concrain Froduct Ap	provu				Lino	ous locations	
(SP)	CCC	(UL)		EHC	RCM	KEx ATEX	
For use in hazard- ous locations	Declaration of Conformity	Test Certifica	ates	Marine / Shipping		other	
IECE×	CE EG-Konf.	<u>Type Test Ce</u> ates/Test Re		ABS	Llovd's Register uts	<u>Confirmation</u>	
Further information							
Information- and Downloadcenter (Catalogs, Brochures,)							
https://www.siemens.com/ic10 Industry Mall (Online ordering system)							
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5554-2HA14							
Cax online generator							
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5554-2HA14							
Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3RW5554-2HA14							
https://support.indust	tion.siemens.com/WW/ lanuals, Certificates, G	Characteristics,	, FAQs,)	-	<u>, , , , , , , , , , , , , , , , , , , </u>		
Image database (pro	tion.siemens.com/WW/ lanuals, Certificates, G	Characteristics, en/ps/3RW5554 ension drawing	, FAQs,) <u>-2HA14</u> js, 3D moo	dels, device circuit		acros,)	
Image database (pro http://www.automatio Characteristic: Trip	tion.siemens.com/WW/ lanuals, Certificates, C ry.siemens.com/cs/ww/ oduct images, 2D dime	Characteristics, en/ps/3RW5554 ension drawing cax_de.aspx?mlf ²t, Let-through (	, FAQs,) <u>-2HA14</u> js, 3D moo fb=3RW55 current	dels, device circuit 554-2HA14⟨=en		acros,)	


 http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5554-2HA14&objecttype=14&gridview=view1

 Simulation Tool for Soft Starters (STS)

 https://support.industry.siemens.com/cs/ww/en/view/101494917

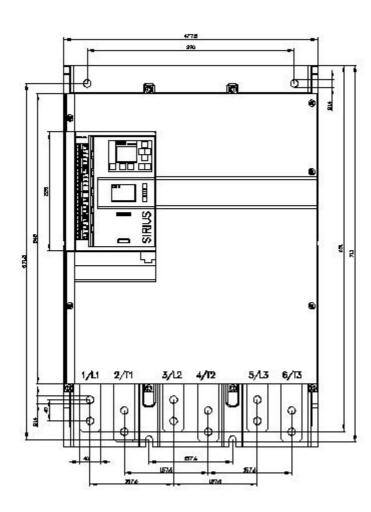

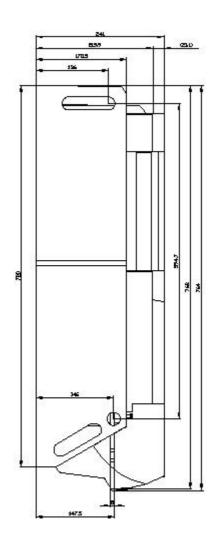

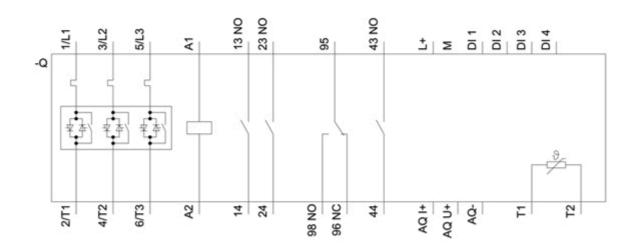

last modified:

3/9/2021 🖸