



SIRIUS soft starter 200-600 V 47 A, 24 V AC/DC spring-type terminals  
Thermistor input

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW52
manufacturer's article number	<div><ul style="list-style-type: none"><li>• of standard HMI module usable</li><li>• of high feature HMI module usable</li><li>• of communication module PROFINET standard usable</li><li>• of communication module PROFIBUS usable</li><li>• of communication module Modbus TCP usable</li><li>• of communication module Modbus RTU usable</li><li>• of communication module Ethernet/IP</li><li>• of circuit breaker usable at 400 V</li><li>• of circuit breaker usable at 500 V</li><li>• of circuit breaker usable at 400 V at inside-delta circuit</li><li>• of circuit breaker usable at 500 V at inside-delta circuit</li><li>• of the gG fuse usable up to 690 V</li><li>• of the gG fuse usable at inside-delta circuit up to 500 V</li><li>• of full range R fuse link for semiconductor protection usable up to 690 V</li><li>• of back-up R fuse link for semiconductor protection usable up to 690 V</li></ul></div>
General technical data	
starting voltage [%]	30 ... 100 %
stopping voltage [%]	50 ... 50 %
start-up ramp time of soft starter	0 ... 20 s
current limiting value [%] adjustable	130 ... 700 %
certificate of suitability	<div><ul style="list-style-type: none"><li>• CE marking</li><li>• UL approval</li><li>• CSA approval</li></ul></div>
product component is supported	<div><ul style="list-style-type: none"><li>• HMI-Standard</li><li>• HMI-High Feature</li></ul></div>
product feature integrated bypass contact system	

3RW5980-0HS00
3RW5980-0HF00
3RW5980-0CS00
3RW5980-0CP00
3RW5980-0CT00
3RW5980-0CR00
3RW5980-0CE00
3RV2032-4JA10: Type of coordination 1, Iq = 65 kA, CLASS 10
3RV2032-4JA10: Type of coordination 1, Iq = 10 kA, CLASS 10
3RV2032-4RA10: Type of coordination 1, Iq = 65 kA, CLASS 10
3RV2032-4RA10: Type of coordination 1, Iq = 10 kA, CLASS 10
3NA3824-6: Type of coordination 1, Iq = 65 kA
3NA3824-6: Type of coordination 1, Iq = 65 kA
3NE1021-2: Type of coordination 2, Iq = 65 kA
3NE8024-1: Type of coordination 2, Iq = 65 kA

<b>number of controlled phases</b>	3
<b>trip class</b>	CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2
<b>buffering time in the event of power failure</b>	
• for main current circuit	100 ms
• for control circuit	100 ms
insulation voltage rated value	600 V
<b>degree of pollution</b>	3, acc. to IEC 60947-4-2
<b>impulse voltage rated value</b>	6 kV
<b>blocking voltage of the thyristor maximum</b>	1 800 V
<b>service factor</b>	1
<b>surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for safe isolation</b>	
• between main and auxiliary circuit	600 V
<b>shock resistance</b>	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
<b>vibration resistance</b>	15 mm to 6 Hz; 2g to 500 Hz
utilization category acc. to IEC 60947-4-2	AC 53a
<b>reference code acc. to IEC 81346-2</b>	Q
<b>Substance Prohibitance (Date)</b>	15.02.2018 00:00:00
<b>product function</b>	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• Soft Torque	Yes
• adjustable current limitation	Yes
• pump ramp down	Yes
• intrinsic device protection	Yes
• motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
• evaluation of thermistor motor protection	Yes; Type A PTC or Klaxon / Thermoclick
• inside-delta circuit	Yes
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
• communication function	Yes
• operating measured value display	Yes; Only in conjunction with special accessories
• error logbook	Yes; Only in conjunction with special accessories
• via software parameterizable	No
• via software configurable	Yes
• <b>PROFenergy</b>	Yes; in connection with the PROFINET Standard communication module
• <b>firmware update</b>	Yes
• <b>removable terminal for control circuit</b>	Yes
• torque control	No
• analog output	No
<b>Power Electronics</b>	
<b>operational current</b>	
• at 40 °C rated value	47 A
• at 50 °C rated value	42 A
• at 60 °C rated value	36 A
<b>operational current at inside-delta circuit</b>	
• at 40 °C rated value	81.4 A
• at 50 °C rated value	72 A
• at 60 °C rated value	62.7 A
<b>operating voltage</b>	
• rated value	200 ... 600 V
• at inside-delta circuit rated value	200 ... 600 V
<b>relative negative tolerance of the operating voltage</b>	-15 %
<b>relative positive tolerance of the operating voltage</b>	10 %
<b>relative negative tolerance of the operating voltage at inside-delta circuit</b>	-15 %

<b>relative positive tolerance of the operating voltage at inside-delta circuit</b>	10 %
<b>operating power for 3-phase motors</b>	
• at 230 V at 40 °C rated value	11 kW
• at 230 V at inside-delta circuit at 40 °C rated value	22 kW
• at 400 V at 40 °C rated value	22 kW
• at 400 V at inside-delta circuit at 40 °C rated value	45 kW
• at 500 V at 40 °C rated value	30 kW
• at 500 V at inside-delta circuit at 40 °C rated value	45 kW
<b>Operating frequency 1 rated value</b>	50 Hz
<b>Operating frequency 2 rated value</b>	60 Hz
<b>relative negative tolerance of the operating frequency</b>	-10 %
<b>relative positive tolerance of the operating frequency</b>	10 %
<b>adjustable motor current</b>	
• at rotary coding switch on switch position 1	20 A
• at rotary coding switch on switch position 2	21.8 A
• at rotary coding switch on switch position 3	23.6 A
• at rotary coding switch on switch position 4	25.4 A
• at rotary coding switch on switch position 5	27.2 A
• at rotary coding switch on switch position 6	29 A
• at rotary coding switch on switch position 7	30.8 A
• at rotary coding switch on switch position 8	32.6 A
• at rotary coding switch on switch position 9	34.4 A
• at rotary coding switch on switch position 10	36.2 A
• at rotary coding switch on switch position 11	38 A
• at rotary coding switch on switch position 12	39.8 A
• at rotary coding switch on switch position 13	41.6 A
• at rotary coding switch on switch position 14	43.4 A
• at rotary coding switch on switch position 15	45.2 A
• at rotary coding switch on switch position 16	47 A
• minimum	20 A
<b>adjustable motor current</b>	
• for inside-delta circuit at rotary coding switch on switch position 1	34.6 A
• for inside-delta circuit at rotary coding switch on switch position 2	37.8 A
• for inside-delta circuit at rotary coding switch on switch position 3	40.9 A
• for inside-delta circuit at rotary coding switch on switch position 4	44 A
• for inside-delta circuit at rotary coding switch on switch position 5	47.1 A
• for inside-delta circuit at rotary coding switch on switch position 6	50.2 A
• for inside-delta circuit at rotary coding switch on switch position 7	53.3 A
• for inside-delta circuit at rotary coding switch on switch position 8	56.5 A
• for inside-delta circuit at rotary coding switch on switch position 9	59.6 A
• for inside-delta circuit at rotary coding switch on switch position 10	62.7 A
• for inside-delta circuit at rotary coding switch on switch position 11	65.8 A
• for inside-delta circuit at rotary coding switch on switch position 12	68.9 A
• for inside-delta circuit at rotary coding switch on switch position 13	72.1 A
• for inside-delta circuit at rotary coding switch on switch position 14	75.2 A
• for inside-delta circuit at rotary coding switch on switch position 15	78.3 A

<ul style="list-style-type: none"> <li>• for inside-delta circuit at rotary coding switch on switch position 16</li> <li>• at inside-delta circuit minimum</li> </ul>	81.4 A 34.6 A
<b>minimum load [%]</b>	15 %; Relative to smallest settable I <sub>e</sub>
<b>power loss [W] for rated value of the current at AC</b> <ul style="list-style-type: none"> <li>• at 40 °C after startup</li> <li>• at 50 °C after startup</li> <li>• at 60 °C after startup</li> </ul>	26 W 24 W 23 W
<b>power loss [W] at AC at current limitation 350 %</b> <ul style="list-style-type: none"> <li>• at 40 °C during startup</li> <li>• at 50 °C during startup</li> <li>• at 60 °C during startup</li> </ul>	606 W 522 W 438 W
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC/DC
<b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>	24 V 24 V
<b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>	-20 %
<b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>	20 %
<b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>	-20 %
<b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>	20 %
<b>control supply voltage frequency</b>	50 ... 60 Hz
<b>relative negative tolerance of the control supply voltage frequency</b>	-10 %
<b>relative positive tolerance of the control supply voltage frequency</b>	10 %
<b>control supply voltage</b> <ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>	24 V
<b>relative negative tolerance of the control supply voltage at DC</b>	-20 %
<b>relative positive tolerance of the control supply voltage at DC</b>	20 %
<b>control supply current in standby mode rated value</b>	160 mA
<b>holding current in bypass operation rated value</b>	380 mA
<b>locked-rotor current at close of bypass contact maximum</b>	7.6 A
<b>inrush current peak at application of control supply voltage maximum</b>	3.3 A
<b>duration of inrush current peak at application of control supply voltage</b>	12.1 ms
<b>design of the overvoltage protection</b>	Varistor
<b>design of short-circuit protection for control circuit</b>	4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply
<b>Inputs/ Outputs</b>	
<b>number of digital inputs</b>	1
<b>number of inputs for thermistor connection</b>	1; Type A PTC or Klaxon / Thermoclick
<b>number of digital outputs</b> <ul style="list-style-type: none"> <li>• not parameterizable</li> </ul>	3 2
<b>digital output version</b>	2 normally-open contacts (NO) / 1 changeover contact (CO)
<b>number of analog outputs</b>	0
<b>switching capacity current of the relay outputs</b> <ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> <li>• at DC-13 at 24 V rated value</li> </ul>	3 A 1 A
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	+/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface
<b>fastening method</b>	screw fixing

<b>height</b>	306 mm
<b>width</b>	185 mm
<b>depth</b>	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
• at the side	5 mm
<b>weight without packaging</b>	5.2 kg
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	
• for main current circuit	box terminal
• for control circuit	spring-loaded terminals
<b>width of connection bar maximum</b>	25 mm
<b>wire length for thermistor connection</b>	
• with conductor cross-section = 0.5 mm <sup>2</sup> maximum	50 m
• with conductor cross-section = 1.5 mm <sup>2</sup> maximum	150 m
• with conductor cross-section = 2.5 mm <sup>2</sup> maximum	250 m
<b>type of connectable conductor cross-sections</b>	
• for main contacts for box terminal using the front clamping point solid	1x (2.5 ... 16 mm <sup>2</sup> )
• for main contacts for box terminal using the front clamping point finely stranded with core end processing	1x (2.5 ... 50 mm <sup>2</sup> )
• for main contacts for box terminal using the front clamping point stranded	1x (10 ... 70 mm <sup>2</sup> )
• at AWG cables for main contacts for box terminal using the front clamping point	1x (10 ... 2/0)
• for main contacts for box terminal using the back clamping point solid	1x (2.5 ... 16 mm <sup>2</sup> )
• at AWG cables for main contacts for box terminal using the back clamping point	1x (10 ... 2/0)
• for main contacts for box terminal using both clamping points solid	2x (2.5 ... 16 mm <sup>2</sup> )
• for main contacts for box terminal using both clamping points finely stranded with core end processing	2x (2.5 ... 35 mm <sup>2</sup> )
• for main contacts for box terminal using both clamping points stranded	2x (6 ... 16 mm <sup>2</sup> ), 2x (10 ... 50 mm <sup>2</sup> )
• for main contacts for box terminal using the back clamping point finely stranded with core end processing	1x (2.5 ... 50 mm <sup>2</sup> )
• for main contacts for box terminal using the back clamping point stranded	1x (10 ... 70 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections</b>	
• for control circuit solid	2x (0.25 ... 1.5 mm <sup>2</sup> )
• for control circuit finely stranded with core end processing	2x (0.25 ... 1.5 mm <sup>2</sup> )
• at AWG cables for control circuit solid	2x (24 ... 16)
• at AWG cables for control circuit finely stranded with core end processing	2x (24 ... 16)
<b>wire length</b>	
• between soft starter and motor maximum	800 m
• at the digital inputs at AC maximum	100 m
• at the digital inputs at DC maximum	1 000 m
<b>tightening torque</b>	
• for main contacts with screw-type terminals	4.5 ... 6 N·m
• for auxiliary and control contacts with screw-type terminals	0.8 ... 1.2 N·m
<b>tightening torque [lbf·in]</b>	
• for main contacts with screw-type terminals	40 ... 53 lbf·in

<ul style="list-style-type: none"> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	7 ... 10.3 lbf-in
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
<b>ambient temperature</b> <ul style="list-style-type: none"> <li>during operation</li> </ul>	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above
<ul style="list-style-type: none"> <li>during storage and transport</li> </ul>	-40 ... +80 °C
<b>environmental category</b> <ul style="list-style-type: none"> <li>during operation acc. to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul style="list-style-type: none"> <li>during storage acc. to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul style="list-style-type: none"> <li>during transport acc. to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
<b>EMC emitted interference</b>	acc. to IEC 60947-4-2: Class A
<b>Communication/ Protocol</b>	
<b>communication module is supported</b> <ul style="list-style-type: none"> <li>PROFINET standard</li> <li>EtherNet/IP</li> <li>Modbus RTU</li> <li>Modbus TCP</li> <li>PROFIBUS</li> </ul>	Yes Yes Yes Yes Yes
<b>UL/CSA ratings</b>	
<b>manufacturer's article number</b> <ul style="list-style-type: none"> <li><b>of circuit breaker</b> <ul style="list-style-type: none"> <li>usable for Standard Faults at 460/480 V according to UL</li> <li>usable for High Faults at 460/480 V according to UL</li> <li>usable for Standard Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> <li>usable for Standard Faults at 575/600 V according to UL</li> <li>usable for Standard Faults at 575/600 V at inside-delta circuit according to UL</li> </ul> </li> <li><b>of the fuse</b> <ul style="list-style-type: none"> <li>usable for Standard Faults up to 575/600 V according to UL</li> <li>usable for High Faults up to 575/600 V according to UL</li> <li>usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> <li>usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul> </li> </ul>	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 90 A; Iq = 5 kA  Siemens type: 3VA51, max. 60 A; Iq max = 65 kA  Siemens type: 3VA51, max. 90 A; Iq = 5 kA  Siemens type: 3VA51, max. 60 A; Iq max = 65 kA  Siemens type: 3RV2742, max. 70 A or 3VA51, max. 90 A; Iq = 5 kA  Siemens type: 3VA51, max. 90 A; Iq = 5 kA  Type: Class RK5 / K5, max. 175 A; Iq = 5 kA  Type: Class J / L, max. 175 A; Iq = 100 kA  Type: Class RK5 / K5, max. 175 A; Iq = 5 kA  Type: Class J / L, max. 175 A; Iq = 100 kA
<b>operating power [hp] for 3-phase motors</b> <ul style="list-style-type: none"> <li>at 200/208 V at 50 °C rated value</li> <li>at 220/230 V at 50 °C rated value</li> <li>at 460/480 V at 50 °C rated value</li> <li>at 575/600 V at 50 °C rated value</li> <li>at 200/208 V at inside-delta circuit at 50 °C rated value</li> <li>at 220/230 V at inside-delta circuit at 50 °C rated value</li> <li>at 460/480 V at inside-delta circuit at 50 °C rated value</li> <li>at 575/600 V at inside-delta circuit at 50 °C rated value</li> </ul>	10 hp 10 hp 30 hp 40 hp 20 hp  25 hp  50 hp 60 hp
<b>contact rating of auxiliary contacts according to UL</b>	R300-B300
<b>Safety related data</b>	
<b>protection class IP on the front acc. to IEC 60529</b>	IP00; IP20 with cover

touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with cover
electromagnetic compatibility	in accordance with IEC 60947-4-2

#### Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



Test Certificates	Marine / Shipping
-------------------	-------------------

[Type Test Certificates/Test Report](#)



other
-------

[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5224-3TC05>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5224-3TC05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5224-3TC05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5224-3TC05&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5224-3TC05&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5224-3TC05/char>

Characteristic: Installation altitude


<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5224-3TC05&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

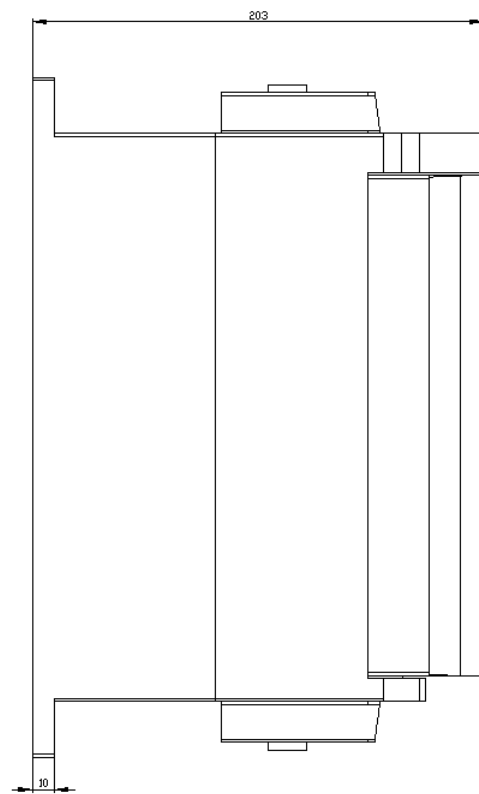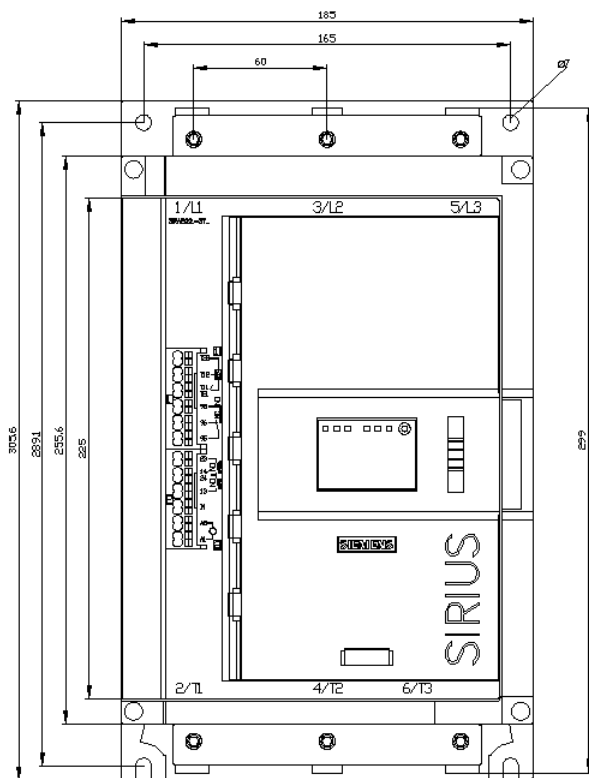



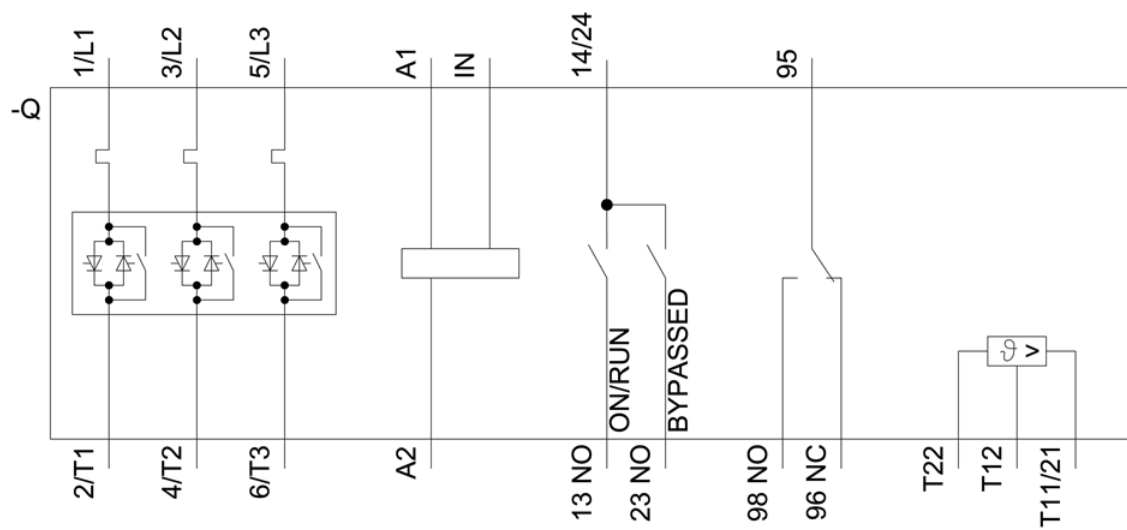

last modified:

8/10/2021